


Fixed Displacement Motor A4FM

for open and closed circuits

Sizes 22...500
Series 1, Series 3
Nominal pressure up to 400 bar
Peak pressure up to 450 bar

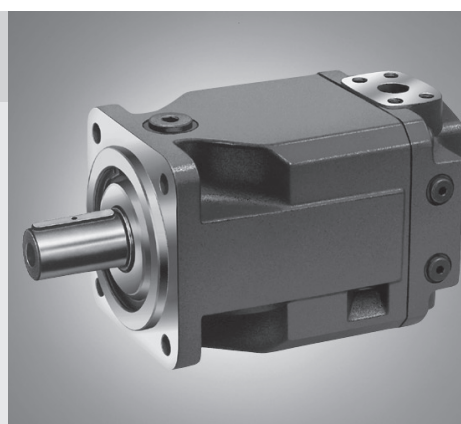

Index

Features
Ordering Code
Technical Data
Installation and Commissioning Guidelines
Flow and Output Torque
Unit Dimensions, Sizes 22, 28
Unit Dimensions, Size 40
Unit Dimensions, Size 56
Unit Dimensions, Size 71
Unit Dimensions, Size 125
Unit Dimensions, Size 250

Features

- 1 – Axial Piston Fixed Displacement Motor A4FM of swashplate
- 2 design is used in open and closed loop circuits for hydrostatic
- 3...5 drives.
- 4 – Output speed is proportional to input flow and inversely propor-
- 6 tional to motor displacement.
- 7 – Output torque increases with the pressure drop across the motor
- 8 between the high and low pressure sides.
- 9 – Long service life, optimum efficiencies
- 10 – Compact design for special applications where A2FM cannot be
- 11 applied
- 12 – Proven rotary group in swashplate-technology

Ordering Code

<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">A4F</td> <td style="padding: 2px 5px;">M</td> <td style="padding: 2px 5px;">/</td> <td style="padding: 2px 5px;">W</td> <td style="padding: 2px 5px;">-</td> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;"></td> </tr> </table>										A4F	M	/	W	-																																													
A4F	M	/	W	-																																																							
Hydraulic fluid <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">Mineral oil, HFD (no code)</td> <td style="border: 1px solid black; width: 50px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">HFA, HFB, HFC-Hydraulic fluid (only sizes 71...500)</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">E-</td> </tr> </table>										Mineral oil, HFD (no code)		HFA, HFB, HFC-Hydraulic fluid (only sizes 71...500)	E-																																														
Mineral oil, HFD (no code)																																																											
HFA, HFB, HFC-Hydraulic fluid (only sizes 71...500)	E-																																																										
Axial piston unit <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">Swashplate design, fixed displacement</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">A4F</td> </tr> </table>										Swashplate design, fixed displacement	A4F																																																
Swashplate design, fixed displacement	A4F																																																										
Mode of operation <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">Motor</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">M</td> </tr> </table>										Motor	M																																																
Motor	M																																																										
Size <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">$\hat{=}$ Displacement V_g (cm³)</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">22</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">28</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">40</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">71</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">125</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">250</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">500</td> </tr> <tr> <td style="border: 1px solid black;"></td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">○</td> </tr> </table>										$\hat{=}$ Displacement V_g (cm ³)	22	28	40	56	71	125	250	500		●	●	●	●	●	●	●	○																																
$\hat{=}$ Displacement V_g (cm ³)	22	28	40	56	71	125	250	500																																																			
	●	●	●	●	●	●	●	○																																																			
Series <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; padding: 2px;">Sizes 22...56, 125...500</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">3</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; padding: 2px;">Size 71</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">1</td> </tr> </table>											Sizes 22...56, 125...500	3		Size 71	1																																												
	Sizes 22...56, 125...500	3																																																									
	Size 71	1																																																									
Index <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; padding: 2px;">Sizes 22...56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">2</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; padding: 2px;">Sizes 71...500</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">0</td> </tr> </table>											Sizes 22...56	2		Sizes 71...500	0																																												
	Sizes 22...56	2																																																									
	Sizes 71...500	0																																																									
Direction of rotation <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">Viewed on shaft end</td> <td style="border: 1px solid black; padding: 2px;">alternating</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">W</td> </tr> </table>										Viewed on shaft end	alternating	W																																															
Viewed on shaft end	alternating	W																																																									
Seals <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">NBR (Nitril-caoutchouc), shaft sealing in FKM (Fluor-caoutchouc)</td> <td style="border: 1px solid black; padding: 2px;">Sizes 22...56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">N</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; padding: 2px;">Sizes 71...500</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">P</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">FKM (Fluor-caoutchouc)</td> <td style="border: 1px solid black; padding: 2px;">Sizes 71...500</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">V</td> </tr> </table>										NBR (Nitril-caoutchouc), shaft sealing in FKM (Fluor-caoutchouc)	Sizes 22...56	N		Sizes 71...500	P	FKM (Fluor-caoutchouc)	Sizes 71...500	V																																									
NBR (Nitril-caoutchouc), shaft sealing in FKM (Fluor-caoutchouc)	Sizes 22...56	N																																																									
	Sizes 71...500	P																																																									
FKM (Fluor-caoutchouc)	Sizes 71...500	V																																																									
Shaft end <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">22</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">28</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">40</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">71</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">125</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">250</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">500</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Splined shaft SAE</td> <td style="border: 1px solid black; text-align: center;">○</td> <td style="border: 1px solid black; text-align: center;">○</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">S</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Splined shaft SAE</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">T</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Splined shaft DIN 5480</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">○</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">Z</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Parallel with key DIN 6885</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">○</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">P</td> </tr> </table>											22	28	40	56	71	125	250	500		Splined shaft SAE	○	○	-	-	-	-	-	-	S	Splined shaft SAE	●	●	-	-	-	-	-	-	T	Splined shaft DIN 5480	-	-	●	●	●	●	●	○	Z	Parallel with key DIN 6885	-	-	-	-	●	●	●	○	P
	22	28	40	56	71	125	250	500																																																			
Splined shaft SAE	○	○	-	-	-	-	-	-	S																																																		
Splined shaft SAE	●	●	-	-	-	-	-	-	T																																																		
Splined shaft DIN 5480	-	-	●	●	●	●	●	○	Z																																																		
Parallel with key DIN 6885	-	-	-	-	●	●	●	○	P																																																		
Mounting flange <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">22</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">28</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">40</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">71</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">125</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">250</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">500</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">SAE 2-hole</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">C</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">ISO 4-hole</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">B</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">ISO 8-hole</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">○</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">H</td> </tr> </table>											22	28	40	56	71	125	250	500		SAE 2-hole	●	●	●	●	-	-	-	-	C	ISO 4-hole	-	-	-	-	●	●	●	-	B	ISO 8-hole	-	-	-	-	-	-	-	○	H										
	22	28	40	56	71	125	250	500																																																			
SAE 2-hole	●	●	●	●	-	-	-	-	C																																																		
ISO 4-hole	-	-	-	-	●	●	●	-	B																																																		
ISO 8-hole	-	-	-	-	-	-	-	○	H																																																		
Service line connections <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;"></td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">22...40</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">56</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">71...500</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Ports A, B: SAE at rear (with metric fixing screws)</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">01</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">Ports A, B: SAE at side (on opposite sides) (with metric fixing screws)</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center;">-</td> <td style="border: 1px solid black; text-align: center;">●</td> <td style="border: 1px solid black; text-align: center; font-weight: bold;">02</td> </tr> </table>											22...40	56	71...500		Ports A, B: SAE at rear (with metric fixing screws)	-	●	●	01	Ports A, B: SAE at side (on opposite sides) (with metric fixing screws)	●	-	●	02																																			
	22...40	56	71...500																																																								
Ports A, B: SAE at rear (with metric fixing screws)	-	●	●	01																																																							
Ports A, B: SAE at side (on opposite sides) (with metric fixing screws)	●	-	●	02																																																							

- = available
○ = available on enquiry
- = not available

Technical Data

Fluid

When using HF- or environmentally acceptable hydraulic fluids possible limitations for the technical data have to be taken into consideration. If necessary please consult our technical department (please indicate type of the hydraulic fluid used for your application on the order sheet).

The sizes 22..56 are not suitable for operation with HFA, HFB and HFC.

Operation viscosity range

In order to obtain optimum efficiency and service life, we recommend that the operating viscosity (at operating temperature) be selected from within the range:

$$v_{opt} = \text{operating viscosity } 16...36 \text{ mm}^2/\text{s}$$

referred to the loop temperature (closed circuit) or tank temperature (open circuit).

Viscosity limits

The limiting values for viscosity are as follows:

Size 22...56

$v_{min} = 5 \text{ mm}^2/\text{s}$, short term at a max. permissible temp. of $t_{max} = 115^\circ\text{C}$

$v_{max} = 1600 \text{ mm}^2/\text{s}$, short term on cold start ($t_{min} = -40^\circ\text{C}$)

Size 71...500


$v_{min} = 10 \text{ mm}^2/\text{s}$, short term at a max. permissible drain temp. $t_{max} = 90^\circ\text{C}$

$v_{max} = 1000 \text{ mm}^2/\text{s}$, short term on cold start ($t_{min} = -25^\circ\text{C}$)

Please note that the max. fluid temperature is also not exceeded in certain areas (for instance bearing area).

At temperature of -25°C up to -40°C special measures may be required for certain installation positions, please contact us.

Selection diagram

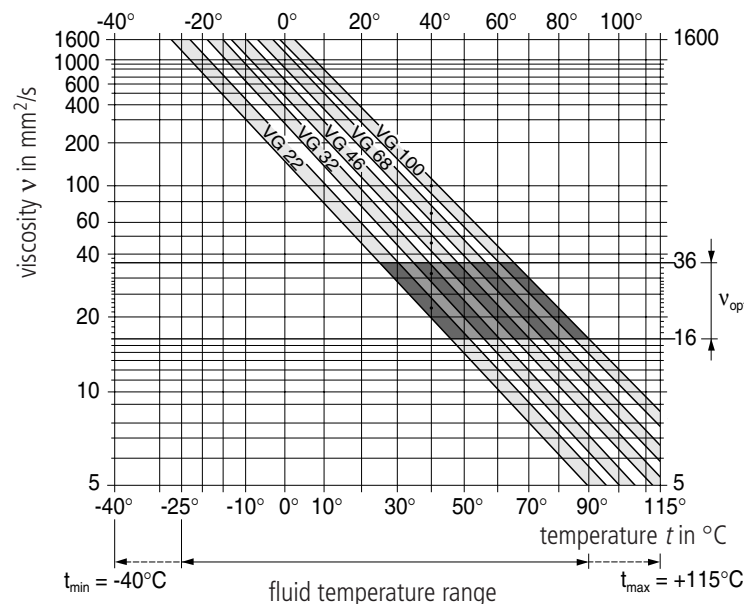

Notes on the selection of the hydraulic fluid

In order to select the correct fluid, it is necessary to know the operating temperature in the loop (closed circuit) or the tank temperature (open circuit) in relation to the ambient temperature.

The hydraulic fluid should be selected so that within the operating temperature range, the operating viscosity lies within the optimum range (v_{opt}) (see shaded section of the selection diagram). We recommend that the highest possible viscosity range should be chosen in each case.

Example: At an ambient temperature of $X^\circ\text{C}$ the operating temperature is 60°C . Within the operating viscosity range (v_{opt} ; shaded area), this corresponds to viscosity ranges VG 46 or VG 68. VG 68 should be selected.

Important: The leakage oil (case drain oil) temperature is influenced by pressure and motor speed and is always higher than the circuit temperature. However, at no point in the circuit may the temperature exceed 115°C for sizes 22...56 or 90°C for sizes 71...500.

If it is not possible to comply with the above condition because of extreme operating parameters or high ambient temperatures we recommend housing flushing. Please consult us.

Filtration

The finer the filtration the better the achieved purity grade of the pressure fluid and the longer the life of the axial piston unit. To ensure the functioning of the axial piston unit a minimum purity grade of:

9 to NAS 1638

18/15 to ISO/DIS 4406 is necessary.

At very high temperatures of the hydraulic fluid (90°C to max. 115°C , not permissible for sizes 71...500) at least cleanliness class

8 to NAS 1638

17/14 to ISO/DIS 4406 is necessary.

If above mentioned grades cannot be maintained please consult supplier.

Technical Data

valid for operation with mineral oils

Flushing of the bearings (Sizes 125...500)

operating conditions, flushing quantities and notes on bearing flushing

Operating pressure range

Maximum pressure at port A or B (Pressure data to DIN 24312)

Size	22...56	71...500
Nominal pressure p_N bar	400 ¹⁾	350
Peak pressure p_{max} bar	450 ¹⁾	400

¹⁾ Size 28 with S-shaft: 315/350 bar

The sum of the pressures at ports A and B may not exceed 700 bar.

Direction of flow


clockwise rotation	anti-clockwise rotation
A to B	B to A

Symbol

Size 22...56

A, B Service line ports

T₁, T₂ Case drain
(1 port plugged)




Size 71...500

A, B Service line ports

M_A, M_B Pressure gauge, working pressure

T, R(L) Case drain, Air bleed
(1 port plugged)

U Flushing port
(Sizes 71...500)



Case drain pressure


The max. permissible leakage pressure (housing pressure) is dependent on speed (see diagram). The pressure in the housing must be equal to or greater than the external pressure on the shaft sealing ring.

Max. leakage pressure (housing pressure)

$p_{abs. max.}$ _____ 6 bar (sizes 22...56)

_____ 4 bar (sizes 71...500)

A leakage line to the tank is necessary.

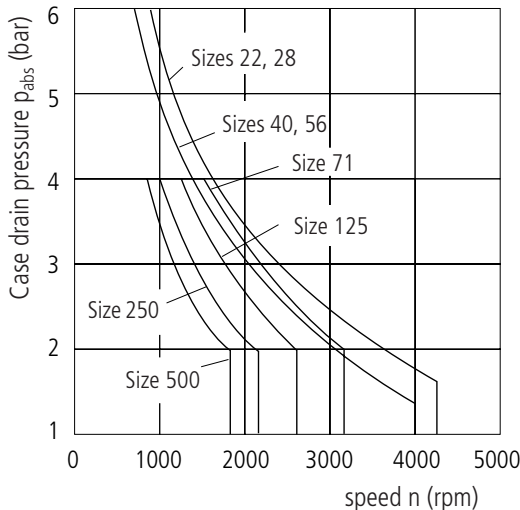

Installation and Commissioning Guidelines

General

At start-up and during operation the motor housing has imperatively to be filled up with hydraulic fluid (filling of the case chamber). Start-up has to be carried out at low speed and without load till the system is completely bled.

At a longer standstill the case may discharge via operating line. At new start-up a sufficient filling of the housing has to be granted.

The leakage oil in the housing has to be discharged to the tank via highest positioned case drain port.


Installation position

- Sizes 22...56: Shaft horizontal or shaft down
- Sizes 71 (series1): Shaft horizontal, vertical installation position as to agreement
- Sizes 125...500: Optional, at vertical installation position bearing flushing is recommended at port U

Installation below tank level

Motor below min. oil level in the tank (standard)


- Fill up axial piston motor before start-up via highest positioned case drain port
- Operate motor at low speed till motor system is completely filled up
- Minimum immersion depth of the drain line in the tank: 200mm (relative to the min. oil level in the tank).

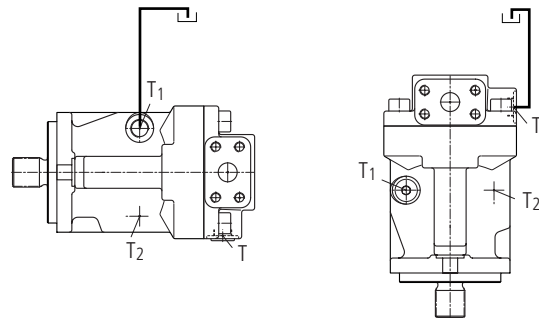

Installation on top of tank level

Motor on top of min. oil level in the tank

- Actions as installation below tank level
- Note: installation position "drive shaft up" for sizes 22...56 not permissible

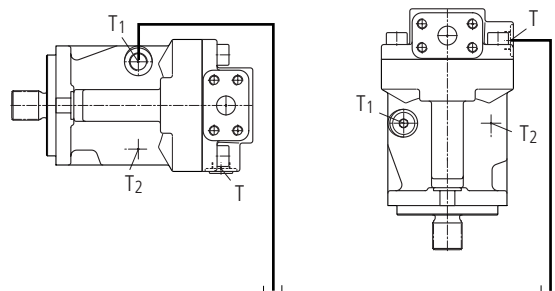

Technical Data

valid for operation with mineral oil

Table of values (theoretical values, without considering η_{mh} and η_v ; values rounded)

Size			22	28	40	56	71	125	250	500
Displacement	V_g	cm ³	22	28	40	56	71	125	250	500
Max. speed	$n_{max\ continuous}$	rpm	4250	4250	4000	3600	3200	2600	2200	1800
	$n_{max\ interm.}^{1)}$	rpm	5000	5000	5000	4500	—	—	—	—
Max. flow (at n_{max})	$q_{V\ max}$	L/min	93	119	160	202	227	325	550	900
Torque constants	T_K	Nm/bar	0,35	0,445	0,64	0,89	1,13	1,99	3,97	7,95
Torque (at $\Delta p = 400$ bar)	T_{max}	Nm	140	178	255	356	395 ²⁾	696 ²⁾	1391 ²⁾	2783 ²⁾
Filling volume		L	0,3	0,3	0,4	0,5	2,0	3,0	7,0	11,0
Moment of inertia about drive axis	J	kgm ²	0,0015	0,0015	0,0043	0,0085	0,0121	0,0300	0,0959	0,3325
Actual starting torque at $n = 0$ rpm ($\Delta p = 350$ bar)		Nm (approx.)					320	564	1127	
Weight (approx.)	m	kg	11	11	15	21	34	61	120	


1) Intermittent max. speed at overspeed: $\Delta p = 70 \dots 150$ bar2) $\Delta p = 350$ bar


Calculation of size

Flow	$q_v = \frac{V_g \cdot n}{1000 \cdot \eta_v}$	in L/min	V_g = geometric displacement per rev. in cm ³ Δp = pressure differential in bar n = speed in rpm η_v = volumetric efficiency
Output speed	$n = \frac{q_v \cdot 1000 \cdot \eta_v}{V_g}$		
Output torque	$T = \frac{V_g \cdot \Delta p \cdot \eta_{mh}}{20 \cdot \pi}$ $= T_K \cdot \Delta p \cdot \eta_{mh}$	in Nm	η_{mh} = mech.-hyd. efficiency η_t = overall efficiency
Output power	$P = \frac{T \cdot n}{9549} = \frac{2 \pi \cdot T \cdot n}{60\,000}$ $= \frac{q_v \cdot \Delta p \cdot \eta_t}{600}$	in kW	

Output drive


permissible axial and radial loading on drive shaft

Size			22	28	40	56
Distance of F_q (from shaft shoulder)		a mm	17,5	17,5	17,5	17,5
		b mm	30	30	30	30
		c mm	42,5	42,5	42,5	42,5
Max. permissible radial force at distance	a	$F_{q\ max}$ N	2500	2050	3600	5000
	b	$F_{q\ max}$ N	1400	1150	2890	4046
	c	$F_{q\ max}$ N	1000	830	2416	3398
Max. permissible axial load		$-F_{ax\ max}$ N	1557	1557	2120	2910
		$+F_{ax\ max}$ N	417	417	880	1490


Size			71	125	250	500
Max. axial force at housing pressure p_{max} 1 bar abs.		$\pm F_{ax\ max}$ N	1400	1900	3000	4000
Max. axial force at housing pressure p_{max} 4 bar abs.		$+F_{ax\ max}$ N	810	1050	1850	2500
		$-F_{ax\ max}$ N	1990	2750	4150	5500
Max. radial force		$F_{q\ max}$ N	1700	2500	4000	5000

Flow and Drive Torque


Size 71

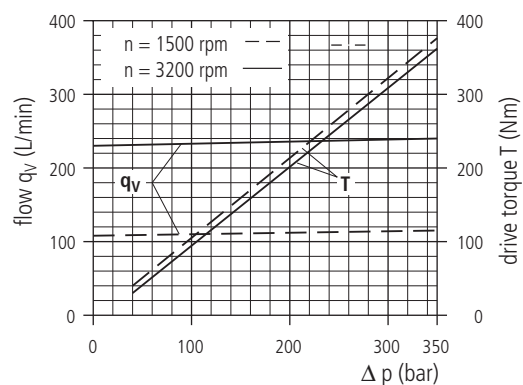


Size 125

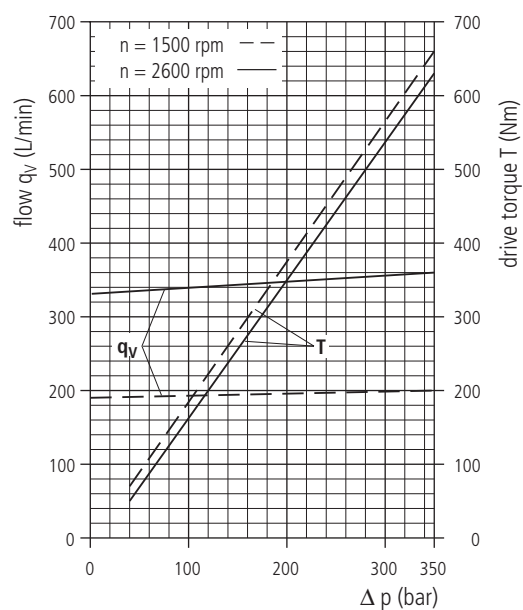

Size 250

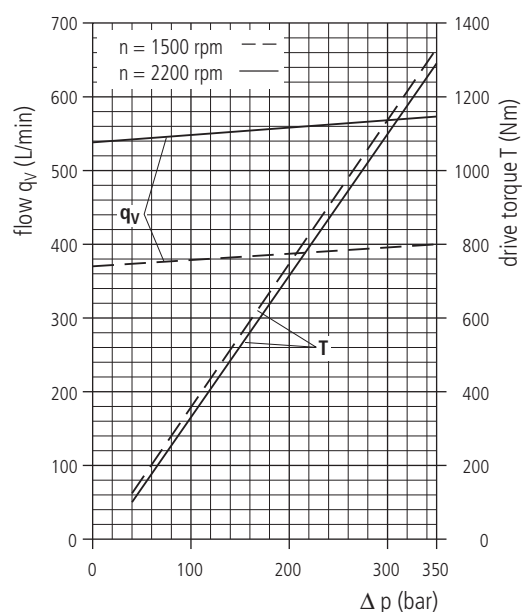


Size 500

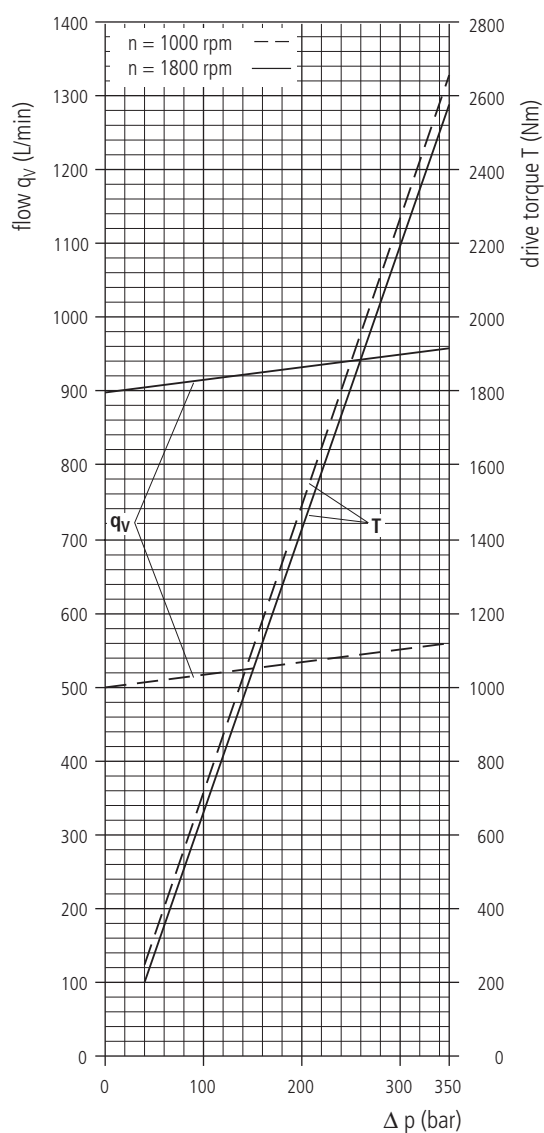

(Fluid: Hydraulic oil ISO VG 46 DIN 51519, $t = 50^\circ\text{C}$)

Unit Dimensions, Size 22, 28

Before finalising your design, please request a certified drawing.

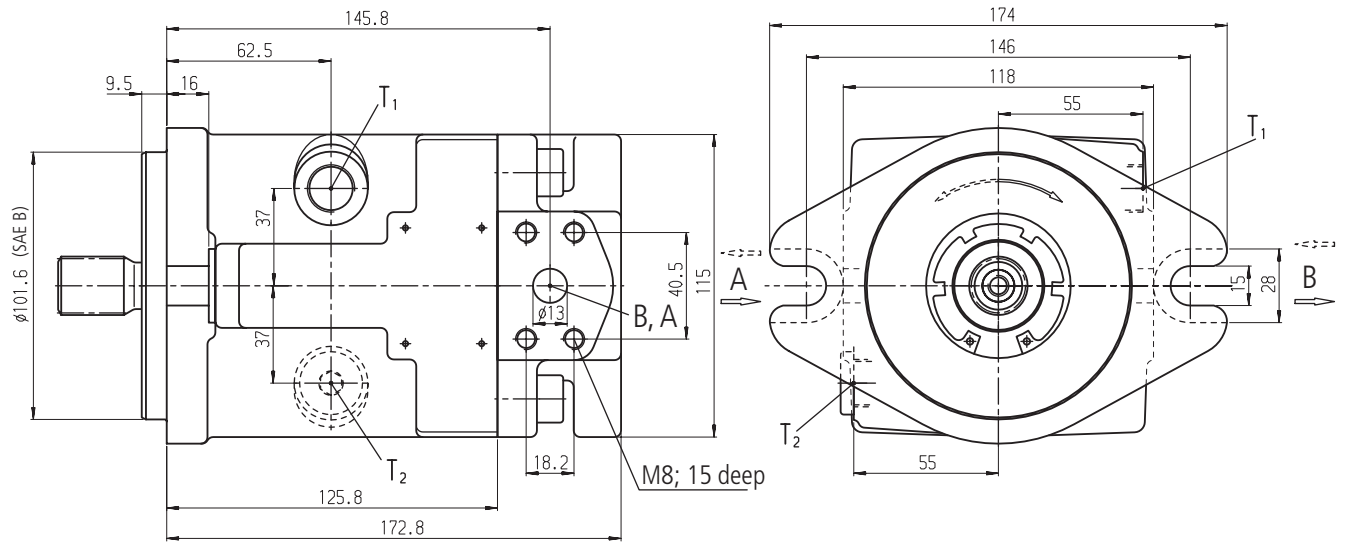

Connections

A, B Service line ports

SAE 1½" 420 bar
(6000 psi) high pressure series


T_1, T_2 Leakage port / oil filling port

M18x1,5; 12 deep

Shaft ends


S

Splined shaft SAE $\frac{7}{8}$ ",
30° pressure angle,
13 teeth, 16/32 pitch,
flat root, side fit,
tolerance class 5
ANSI B92.1a-1976




T

Splined shaft SAE 1"
30° pressure angle,
15 teeth, 16/32 pitch,
flat root, side fit,
tolerance class 5
ANSI B92.1a-1976



Unit Dimensions, Size 40

Before finalising your design, please request a certified drawing.

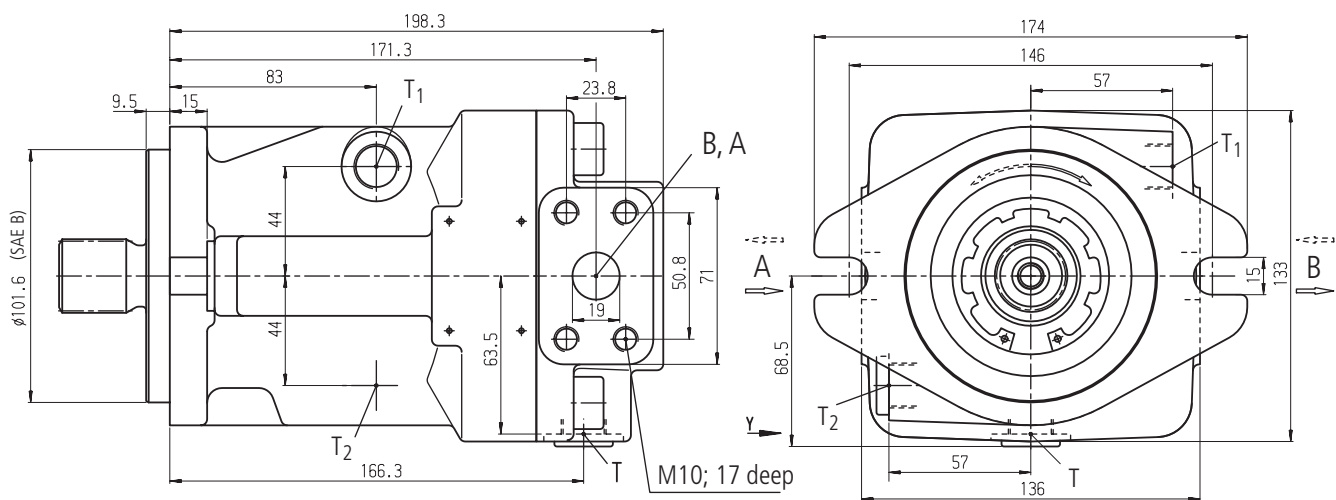

Connections

A, B Service line ports

SAE $\frac{3}{4}$ " 420 bar
(6000 psi) high pressure serie


T, T₁, T₂ Leakage port / oil filling port

M18x1,5; 15 deep

Shaft ends



Z

Splined shaft
W 30x2x30x14x9g
DIN 5480



Unit Dimensions, Size 56

Before finalising your design, please request a certified drawing.

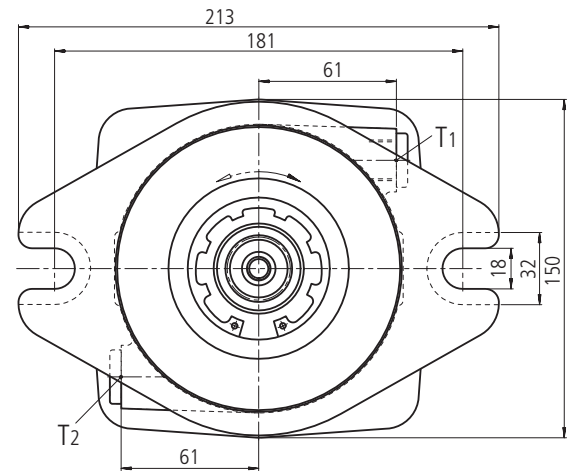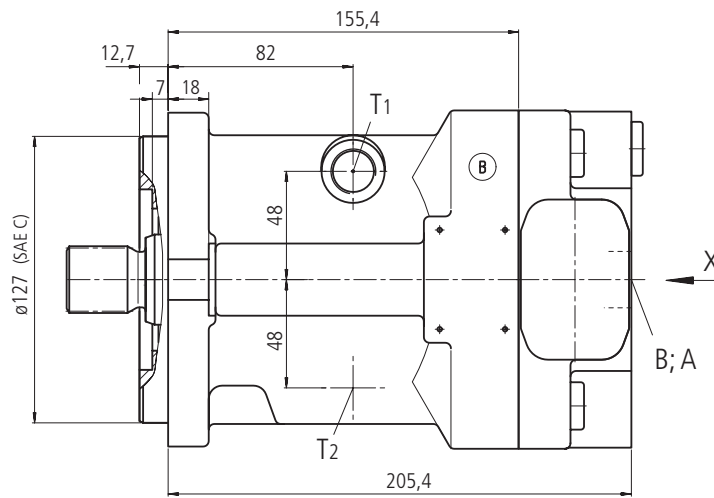


Connections

A, B Service line ports

T, T₁, T₂ Leakage port / oil filling port


SAE 3/4" 420 bar
(6000 psi) high pressure serie
M 18x1,5 ; 12 deep

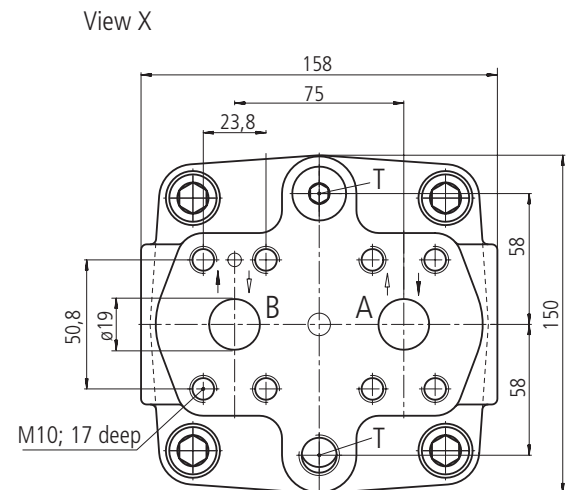

Shaft ends


Z

Splined shaft
W 30x2x30x14x9g
DIN 5480



Unit Dimensions, Size 71

Before finalising your design, please request a certified drawing.

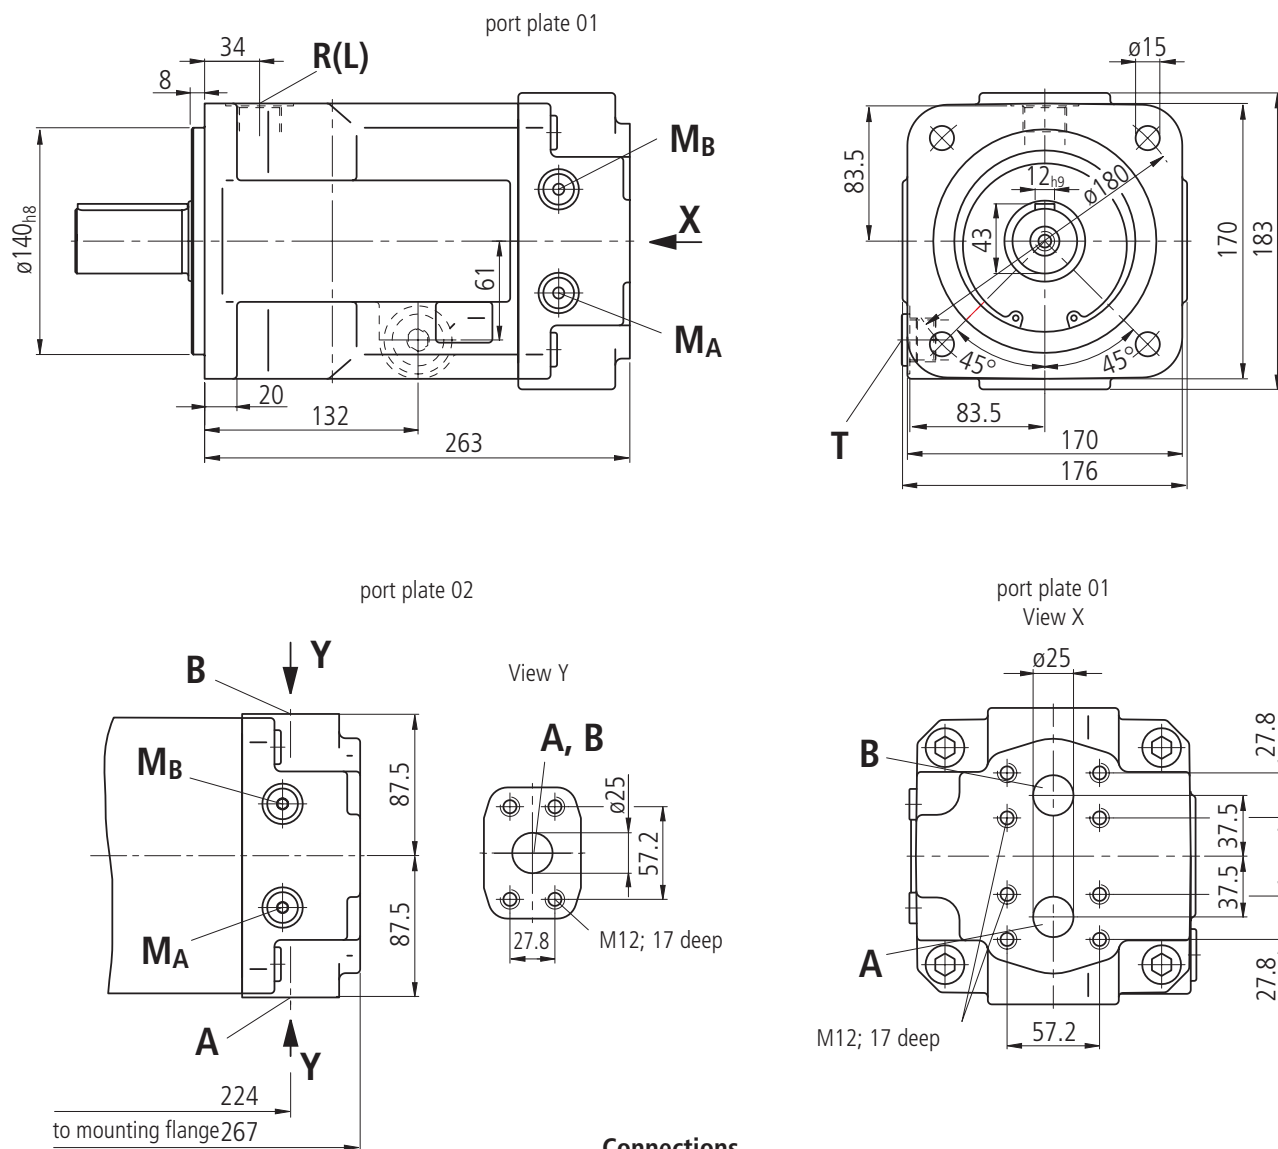


Connections

A, B	service line ports	SAE 1" (high pressure series)
R (L)	oil filling and bleed	M27x2
T	oil drain (plugged)	M27x2
M _A , M _B	measuring port for pressure (plugged)	M14x1,5

Shaft end


P

Parallel shaft with key
AS 12x8x68
DIN 6885




Z

Splined shaft
W40x2x30x18x9g
DIN 5480



Unit Dimensions, Size 125

Before finalising your design, please request a certified drawing.

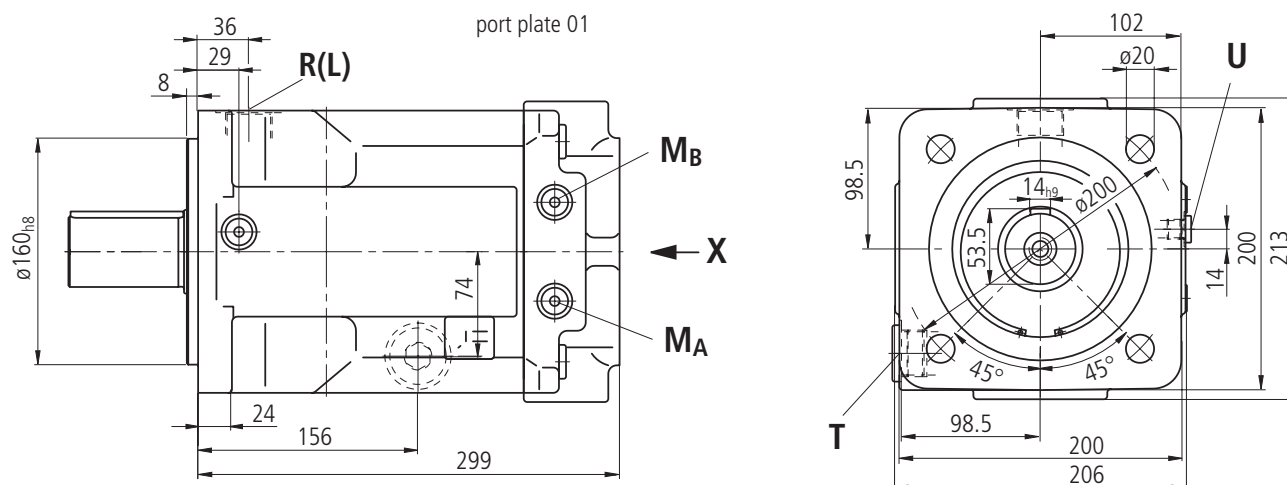


Connections

A, B	service line ports	SAE 1 1/4" (high pressure series)
R (L)	oil filling and bleed	M33x2
T	oil drain (plugged)	M33x2
MA, MB	measuring port for pressure (plugged)	M14x1,5
U	Flushing port, flushing of the bearings (plugged)	M14x1,5

Shaft end


P

Parallel shaft with key
14x9x80
DIN 6885







Z

Splined shaft
W50x2x30x24x9g
DIN 5480



Unit Dimensions, Size 250

Before finalising your design, please request a certified drawing.

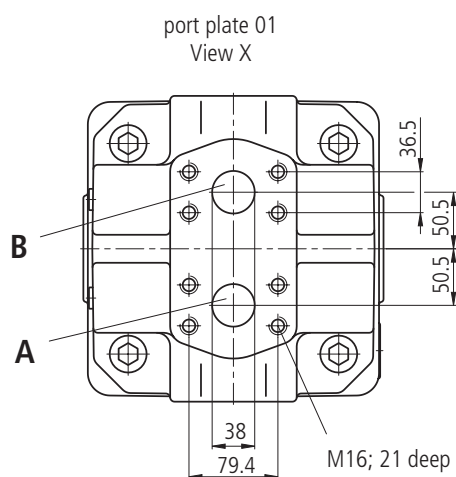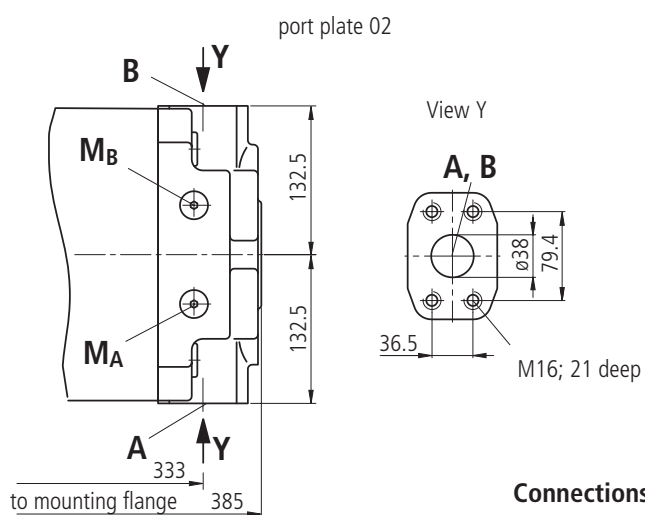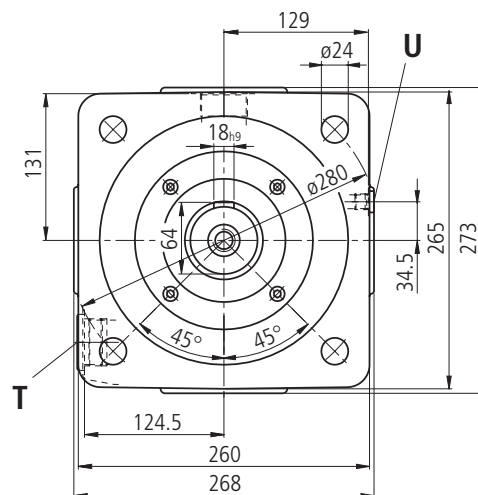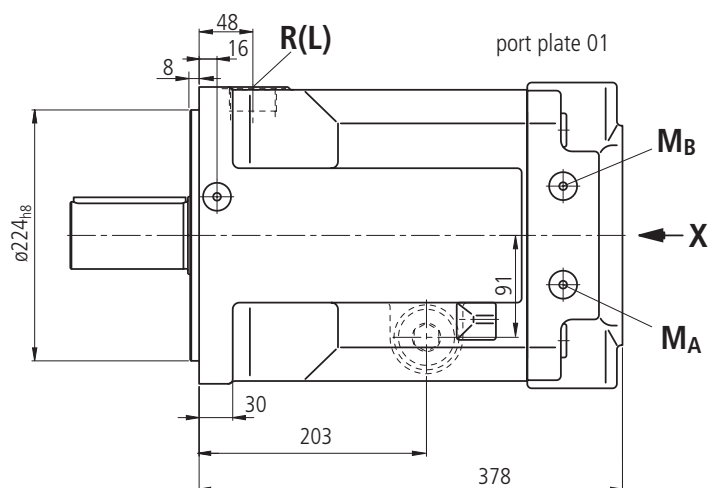


Connections

A, B	service line ports	SAE 1 1/2" (high pressure series)
R (L)	oil filling and bleed	M42x2
T	oil drain (plugged)	M42x2
M_A, M_B	measuring port for pressure (plugged)	M14x1,5
U	Flushing port, flushing of the bearings (plugged)	M14x1,5

Shaft end

P

Parallel shaft with key
AS 18x11x100
DIN 6885



Z

Splined shaft
W60x2x30x28x9g
DIN 5480

