

H-HMC液压马达

H-HMC hydraulic motors



1、产品特点/ Product Feature	88
2、产品标识说明/ Ordering Code	88
3、型号举例/ Example	88
5、安装联接尺寸/ Installation Dimensions	
H-HMC100系列/ H-HMC100 Series	89
H-HMC125系列/ H-HMC125 Series	93
H-HMC200系列/ H-HMC200 Series	100
H-HMC270/325系列/ H-HMC270/325 Series	107

H-HMC系列/H-HMC Series



产品特点 / Product Feature

H-HMC系列液压马达是我公司在H-HMB系列基础上最新研发的双排量低速大扭矩液压马达，继承了H-HMB系列静压平衡的优点，具有同H-HMB系列同样的高效率、高启动扭矩、高容积效率等。

H-HMC系列液压马达具有双排量功能，可以从较宽范围的排量中选择适合于各种应用需求的排量。可以通过远程控制、自动切换或手动切换来实现排量的切换，并且可以在马达运转中简单和轻松的实现。

其主要特点如下：

- 低速大扭矩；
- 高效率；
- 运转平稳；
- 宽排量范围可供选择；
- 可在运转时进行排量切换；
- 可选择电磁切换、手动切换、自动切换方式。

H-HMC series' dual speed hydraulic motor is an upgrade of the H-HMB series low-speed and high torque hydraulic motors. It inherits the H-HMB series hydrostatic balance structure, and is features with high efficiency, high starting torque, high volumetric efficiency, etc.

H-HMC series' dual speed hydraulic motor enables users to select displacement in a wide range for special working conditions. Users can switch the displacement by using a remote control or manual control, with control valve mounted on the motor. The displacement can be switched easily while the motor is running.

Main characteristics:

- Low speed, high-torque;
- High efficiency;
- Stable performance;
- Wide-range option of displacement;
- Switchable displacement while the motor is running;
- Switch option: electromagnetic, manual, automatic.

产品标识说明 / Ordering Code

****-***-***-***-***-***-**-**

	1	2	3	4	5	6	7	8
H-HMC 双速液压马达代号 / Model - EHMC								
型号 / Type								
大排量 / Large Displacement								
小排量 / Small Displacement								
输出轴形式 / Shaft options								
a、P表示为平键轴	P — Parallel keyed shaft							
b、T表示为锥轴	T — Taper keyed shaft							
c、S表示为外花键轴	S — Spline shaft							
d、Q表示为内花键轴	Q — Female spline shaft							
进出油口形式 / Distributor								
切换阀的类型 / Switch valve options								
* 无控制阀 / Null control valve								
E 电磁控制阀 / Electromagnetic control valve								
M 手动控制阀 / Manual control valve								
Z 自动2速阀 / Automatic two-speed switching valve								
L 强制低速切换自动2速阀 / Mandatory automatic low-speed switching valve								
W 无极变速阀 / continuously variable valve								
V 强制低速无极变速阀 / continuously variable transmission valve with low speed enforcement								
变量方式 (详见控制原理图) / Variable control (See control schematic)								

型号举例 / Example

H-HMC	200	3100	1000	S71	F02	M	C
-------	-----	------	------	-----	-----	---	---

马达代号 / Model	H-HMC
型号 / Type	200
大排量 / Large displacement	3100 ml/r
小排量 / Small displacement	1000 ml/r
输出轴 / Shaft	S71
进出油口形式 / Distributor	F02
切换阀的类型 / Type of switch valve	M
变量控制方式 / Variable control	C

H-FM

H-GM

QJM

H-HMB

H-HMC

HCA

HCB

HMS

HA6V

HA2F

H-HMC100系列/H-HMC100 Series

技术参数 / Technical Specification

名义排量 Nominal Displacement	ml/r	1600	1500	1400	1300	1200	1100	1000	900	800	700	600	500	400	300	200	100
排量 Displacement	ml/r	1580	1481	1383	1284	1185	1086	987	889	790	691	592	494	395	296	197	98/0
单位扭矩 Unit torque	N.m/MPa	225	212	198	184	169	155	140	125	108	94	78	68	45	30	18	0
最高转速 Max. Speed	r/min	240	260	280	300	330	370	405	485	540	540	540	540	540	540	540	900
额定功率 Rated Power	KW	102	98	93	92	93	90	86	83	73	64	53	46	31	20	9	0
最大功率 Max. Power	KW	127	123	116	116	117	113	108	103	92	80	66	58	38	25	11	0
额定压力 Rated Pressure	MPa	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	1.5
最高压力 Max. Pressure	MPa	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	1.5


* H-HMC 100排量的选择范围/ H-HMC 100 displacement options

大排量为 / Large Displacement: 1600, 1500, 1400, 1300, 1200, 1100, 1000, 900, 800;


小排量为 / Small Displacement: 1100, 1000, 900, 800, 700, 600, 500, 400, 300, 200, 100, 0

控制原理图 / Control Schematic(编码标识/Ordering Code 8):


-A- 外控型
Control by external

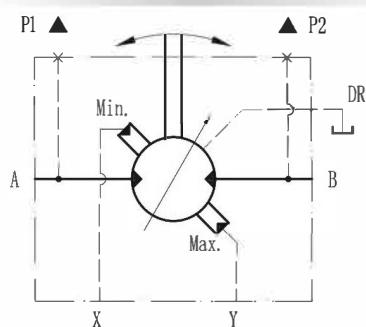


-B- PC外控型
Control by port pc

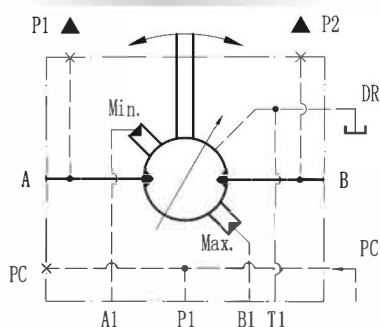


-C- 双向内控型
Control by A or B

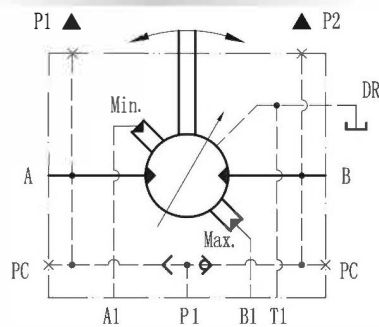

-D- A口内控型
Control by port A

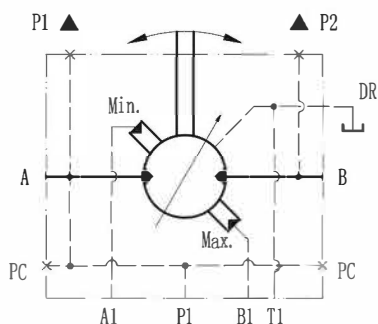

-E- B口内控型
Control by port B

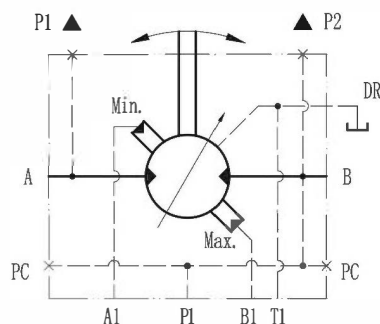


H-HMC


H-HMC100系列/H-HMC100 Series

H-HMC100 输出轴的安装尺寸/ H-HMC100 Shaft Options(编码标识/Ordering code 5)


H-HMC100-P71

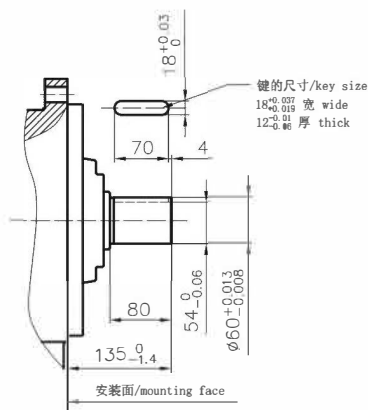


H-HMC100-S71*&S72*

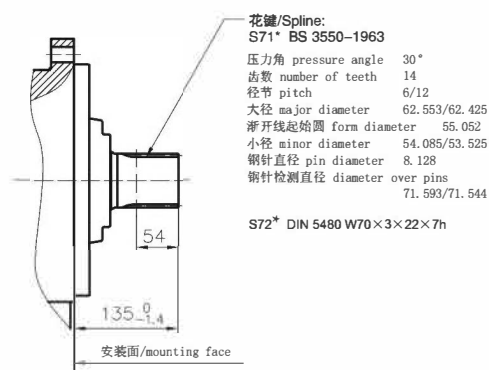

H-HMC100-Q71

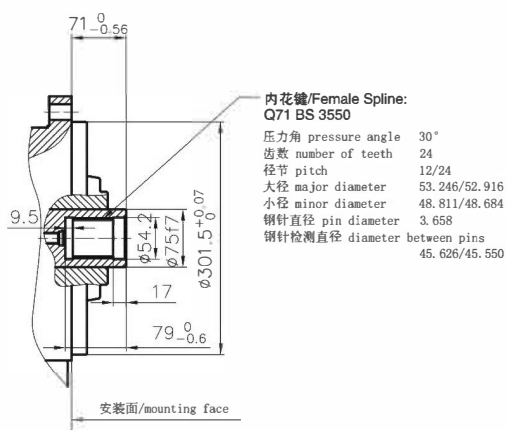

H-HMC100-T71

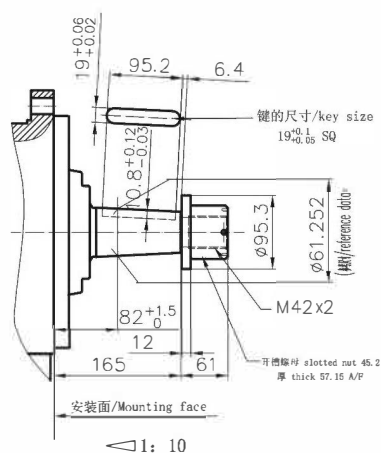


注释: S71*/S72* 为标准花键轴

Notes: S71*/S72*=Standard Spline Shaft

H-HMC100系列/H-HMC100 Series

H-HMC100 外形及安装尺寸/ H-HMC100 Installation Dimensions

进出油口为F01B的安装尺寸/ F01B Distributor

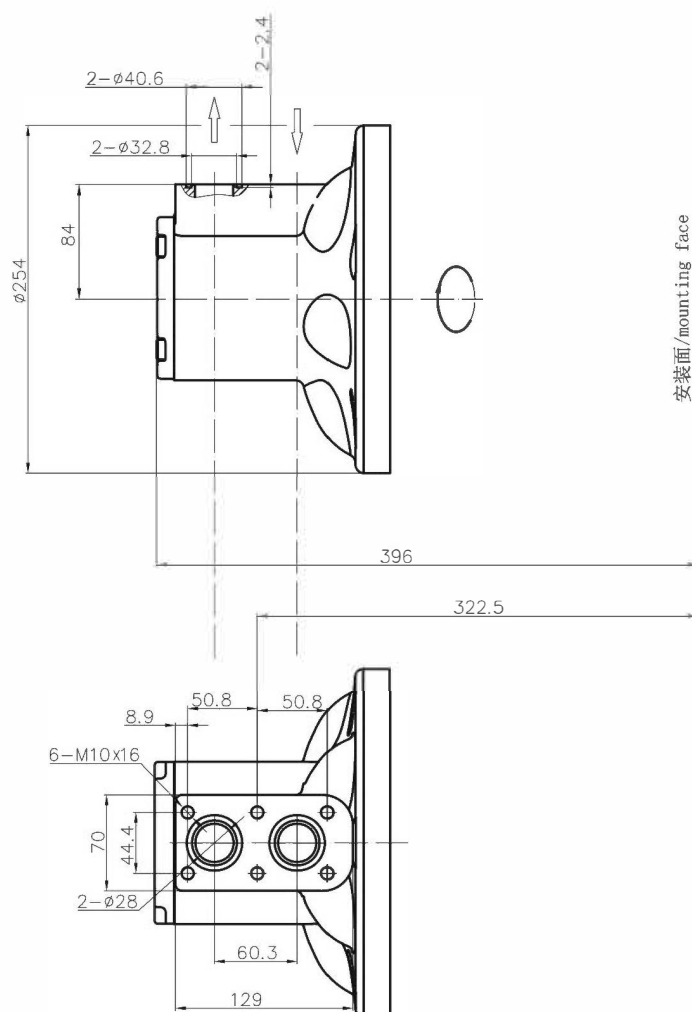

HFM

HGM

QJM

H-HMB

H-HMC

HCA

HCB

HMS

HA6V

HA2F

H-HMC125系列/H-HMC125 Series

技术参数 / Technical Specification

名义排量 /Nominal Displacement 编码标识/Ordering Code 3 4	ml/r	2100	2000	1800	1600	1500	1300	1200	1000	830	670	510	350	190
排量 Displacement	ml/r	2066	1973	1811	1649	1487	1325	1163	1001	839	677	515	353	191
单位扭矩 Unit Torque	N.m/MPa	293	281	258	231	206	180	154	125	100	79	57	39	6
最高转速F01 Max. Speed	r/min	169	188	204	223	246	265	305	350	395	485	540	540	540
最高转速F02 Max. Speed	r/min	220	245	265	290	320	320	320	320	320	320	320	320	320
额定功率 Rated Power	KW	105	105	105	105	97	84	72	59	47	37	27	18	3
最大功率 Max. Power	KW	132	132	132	132	121	106	90	73	59	46	33	23	4
额定压力 Rated Pressure	MPa	23	23	23	23	23	23	23	23	23	23	23	23	23
最高压力 Max. Pressure	MPa	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5


* H-HMC 125排量的选择范围/ H-HMC 125 displacement options

大排量为 / Large Displacement: 2100, 2000, 1800, 1600


小排量为 / Small Displacement: 1600, 1500, 1300, 1200, 1000, 830, 670, 510, 350, 190, 110, 0

控制原理图 / Control Schematic(编码标识/Ordering Code 8):


-A- 外控型
Control by external

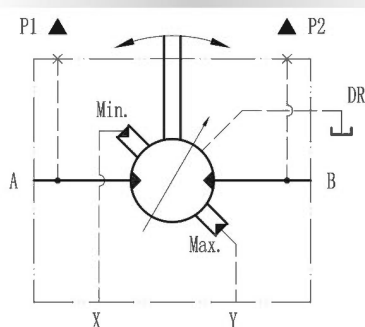


-B- PC外控型
Control by port pc

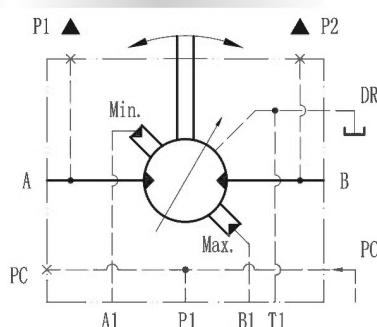


-C- 双向内控型
Control by A or B

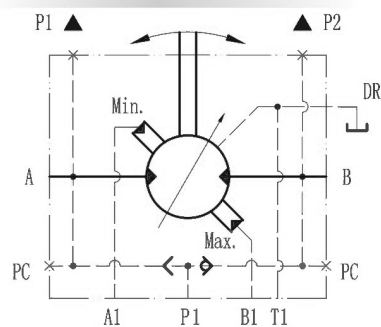

-D- A口内控型
Control by port A

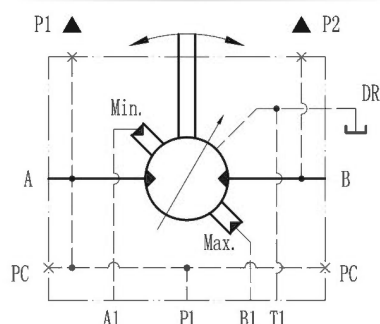



-E- B口内控型
Control by port B

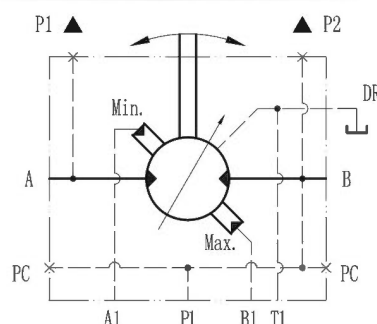

H-HMC125系列/H-HMC125 Series

H-HMC125 外形及安装尺寸/ H-HMC125 Installation Dimensions


进出油口为F01的安装尺寸/With F01 Distributor

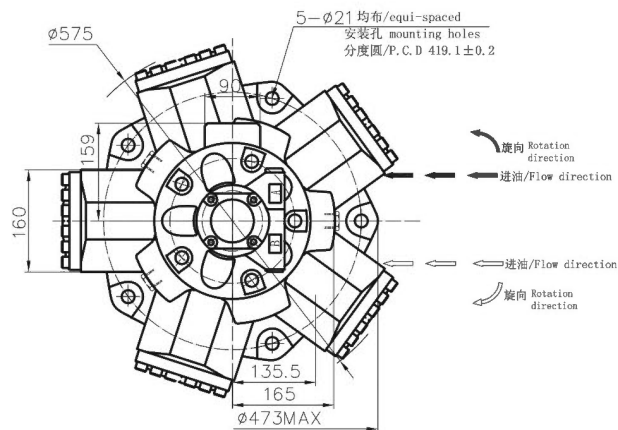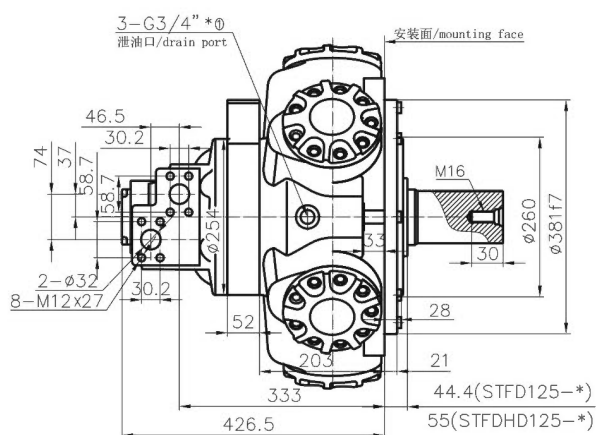


*①可选配UNF3/4"-16接头/Option: UNF3/4"-16

变量控制方式的安装尺寸/Variable Control Dimensions (编码标识/Ordering code 8)

A的安装尺寸/Dimensions

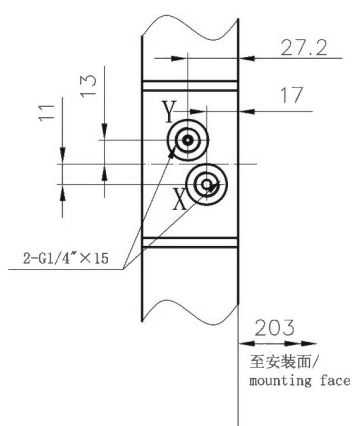


B&C&D的安装尺寸/Dimensions

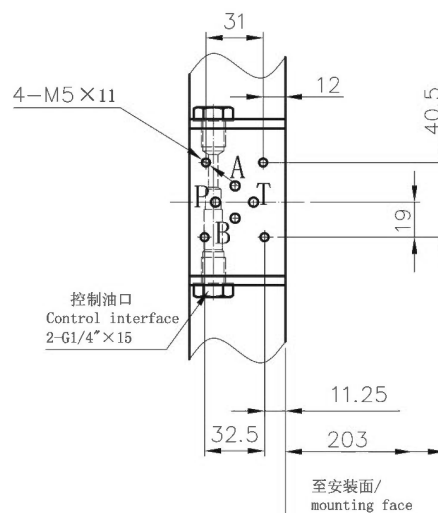


H-HMC125系列/H-HMC125 Series

H-HMC125 输出轴的安装尺寸/ H-HMC125 Shaft Options(编码标识/Ordering code 5)


H-HMC125-P71

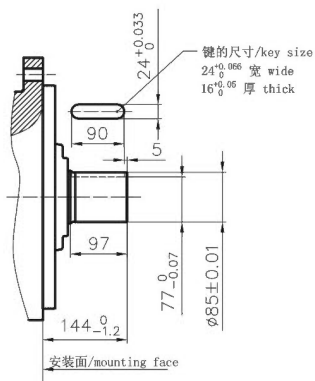


H-HMC125-S71*&S72*

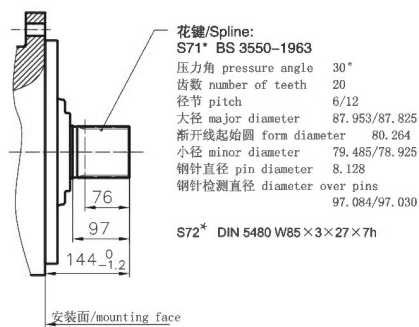


H-HMCHD125-Q71

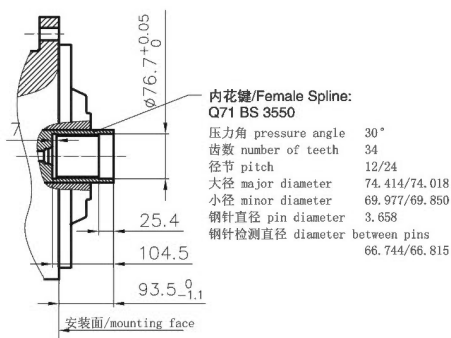


H-HMCHD125-S73



H-HMCC125-Q71

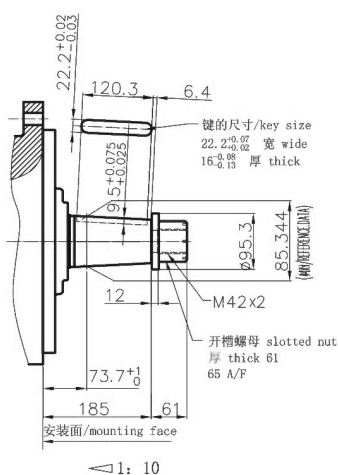


H-HMCHD125-T72

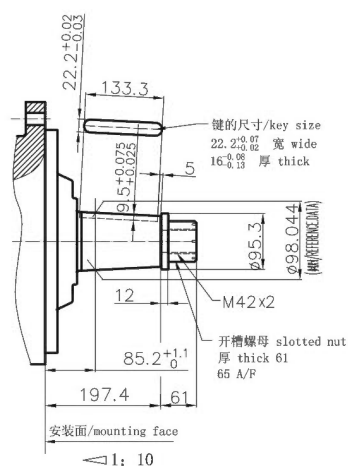


注释: S71*/S72* 为标准花键轴
Notes: S71*/ S72*=Standard Spline Shaft

CC BY-SA


H-HMC125-P73

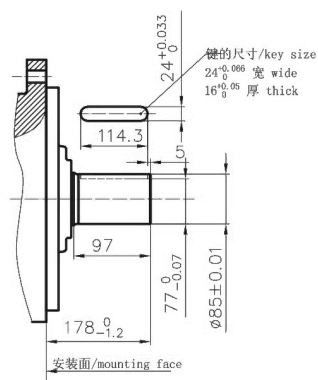

H-HMCHD125-T73

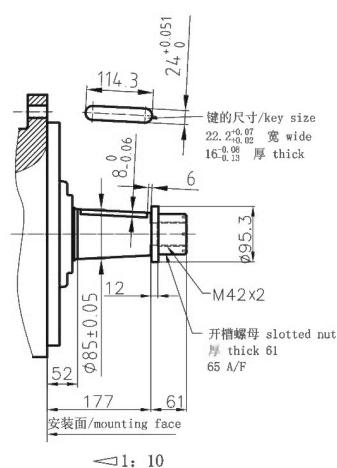


▷ 1: 10



H-HMC125系列/H-HMC125 Series

H-HMC125 外形及安装尺寸/ H-HMC125 Installation Dimensions

进出油口为F01B的安装尺寸/ F01B Distributor

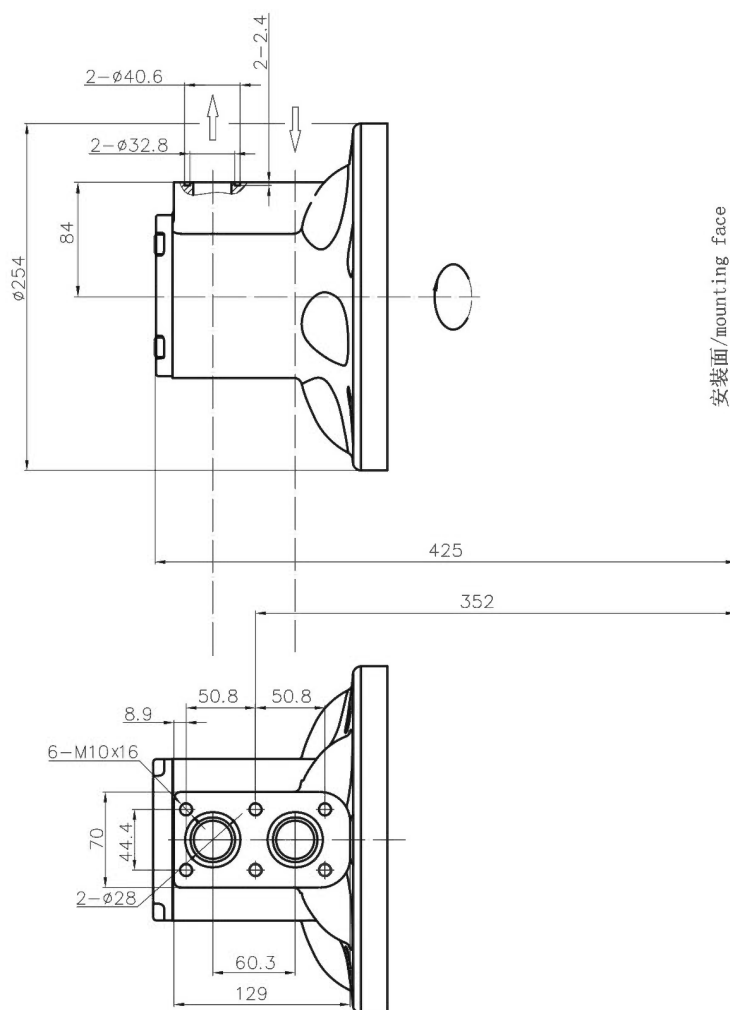

HFM

HGM

QJM

H-HMB

H-HMC

HCA

HCB

HMS

HA6V

HA2F

进出油口为F02的安装尺寸/ F02 Distributor



H-HMC200系列/H-HMC200 Series

技术参数 / Technical Specification


名义排量 / Nominal Displacement 编码标识/Ordering Code 3 4	ml/r	3100	2900	2800	2600	2400	2300	2100	2000	1800	1600	1500	1300	1200	1000	830	670	510	350	190	110
排量 Displacement	ml/r	3080	2958	2796	2634	2472	2310	2148	1973	1811	1649	1487	1325	1163	1001	839	677	515	353	191	109/0
单位扭矩 Unit Torque	N.m/MPa	447	422	400	375	351	326	300	281	258	231	206	180	154	125	100	79	57	30	6	0
最高转速F01 Max. Speed	r/min	110	115	125	135	140	150	160	175	190	210	230	265	305	350	395	485	540	540	540	900
最高转速F02 Max. Speed	r/min	155	160	175	190	196	210	220	245	265	290	320	320	320	320	320	320	320	320	320	900
额定功率 Max. Power	KW	115	115	115	112	108	108	104	101	100	98	97	90	83	67	54	42	31	16	3	0
最大功率 Max. Power	KW	145	145	145	140	135	134	130	126	125	123	121	113	103	84	67	53	38	20	4	0
额定压力 Rated Pressure	MPa	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	1.5
最高压力 Max. Pressure	MPa	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	1.5

* H-HMC200排量的选择范围/ H-HMC200 displacement options

大排量为 / Large Displacement: 3100, 2900, 2800, 2600, 2400, 2300, 2100, 2000, 1800, 1600

小排量为 / Small Displacement: 2300, 2100, 2000, 1800, 1600, 1500, 1300, 1200, 1000, 830, 670, 510, 350, 190, 110, 0


控制原理图 / Control Schematic(编码标识/Ordering Code 8):

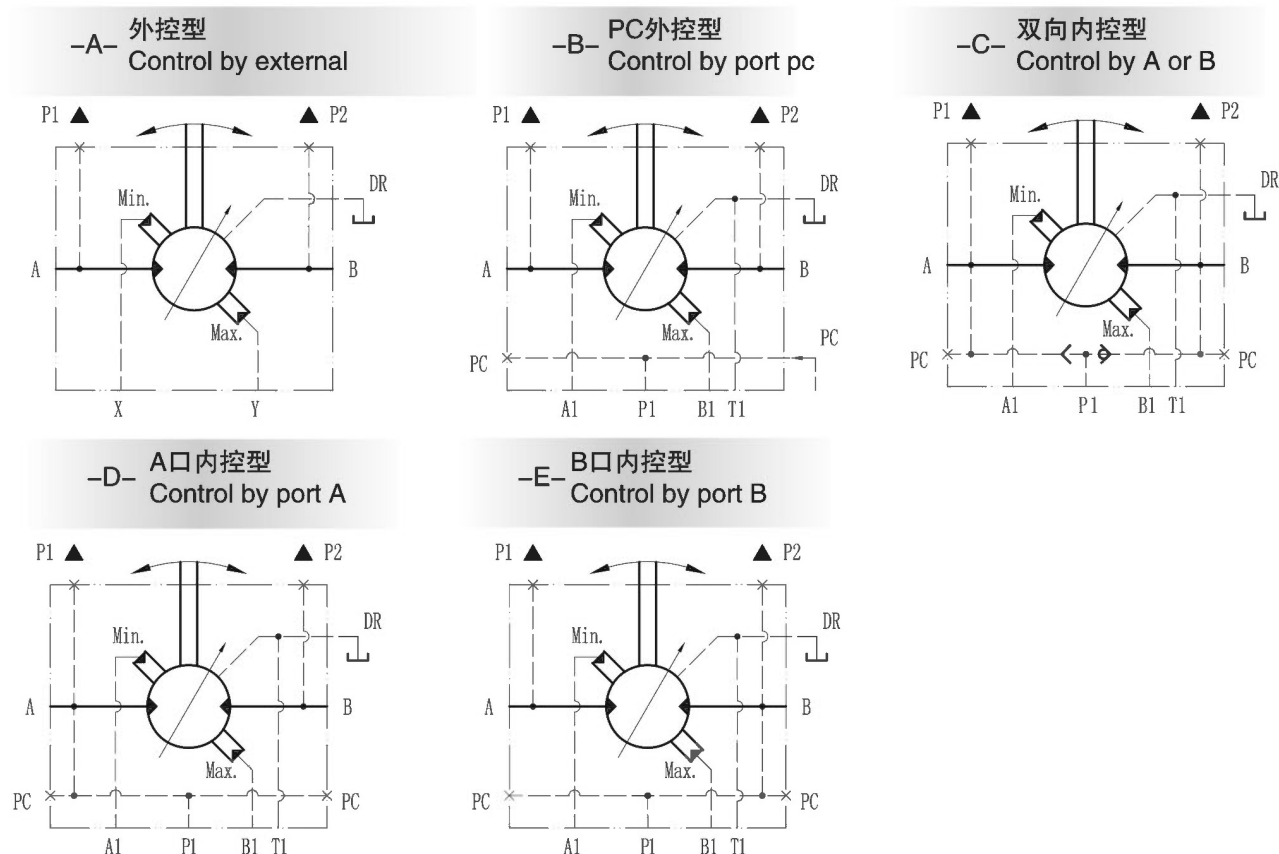

H-HMC200系列/H-HMC200 Series

H-HMC200 外形及安装尺寸/ H-HMC200 Installation Dimensions


进出油口为F02的安装尺寸/With F02 Distributor

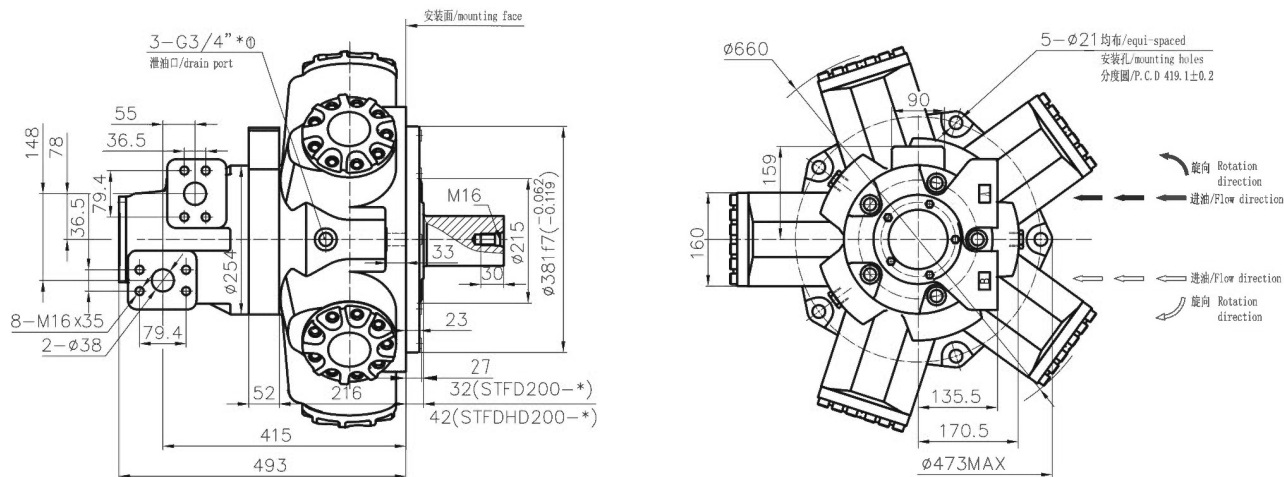


*①可选配UNF3/4"-16接头/Option: UNF3/4"-16

变量控制方式的安装尺寸/Variable Control Dimensions (编码标识/Ordering code B)

A的安装尺寸/Dimensions

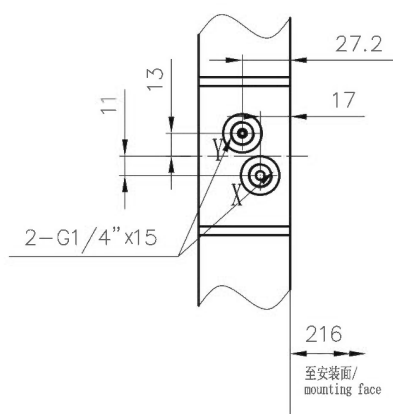


B&C&D的安装尺寸/Dimensions

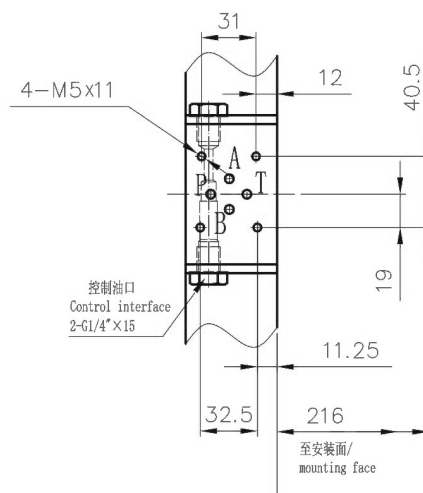


H-HMC200系列/H-HMC200 Series

H-HMC200 输出轴的安装尺寸/ H-HMC200 Shaft Options(编码标识/Ordering code 5)


H-HMC200-P71

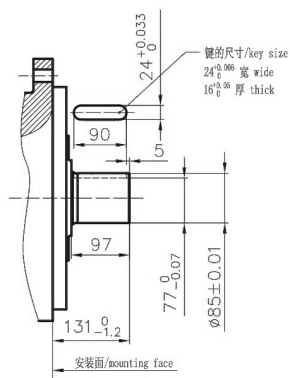


H-HMC200-S71*&S72*

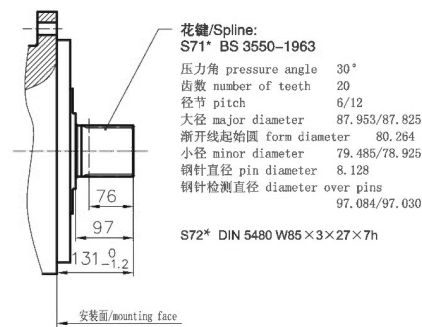


H-HMCHD200-Q71

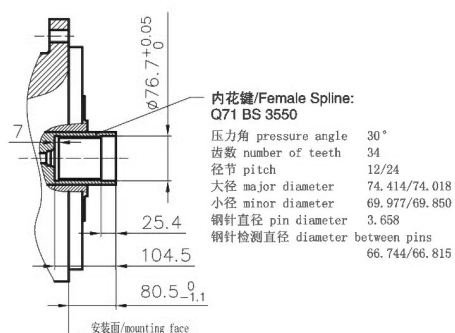

H-HMCHD200-S73




H-HMC200-T71

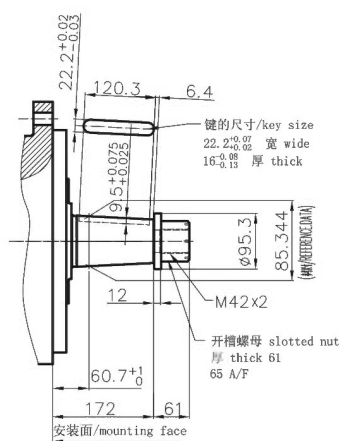

◁1: 10

H-HMCHD200-T72

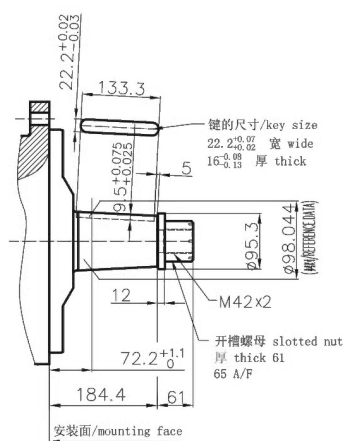


◁1: 10


注释: S71*/S72* 为标准花键轴
Notes: S71*/S72*=Standard Spline Shaft

H-HMC200系列/H-HMC200 Series


STFDHD200-P72

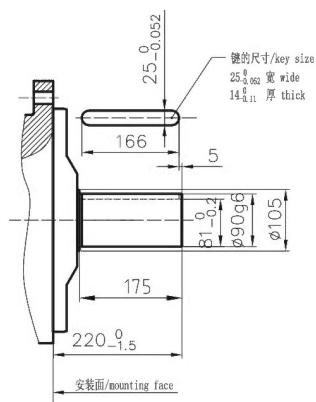


H-HMC200-P73

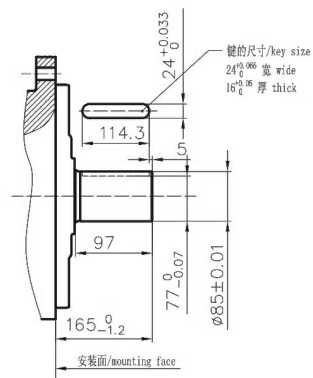


H-HMC200-P76

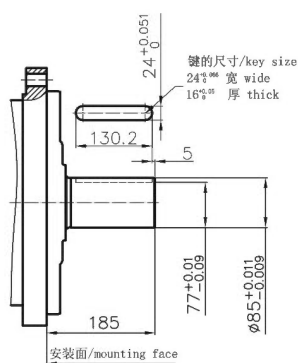

H-HMC200-T73

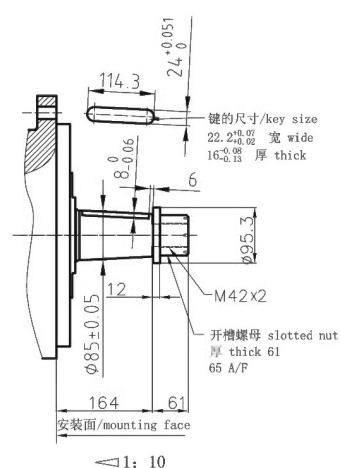

H-HMCHD200-T75

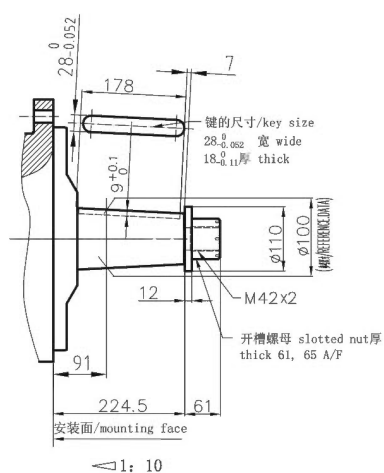

注释: S71*/S72* 为标准花键轴
Notes: S71*/ S72*=Standard Spline Shaft


10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044

104

H-HMC200系列/H-HMC200 Series

H-HMC200 外形及安装尺寸/ H-HMC200 Installation Dimensions

进出油口为F01的安装尺寸/ F01 Distributor

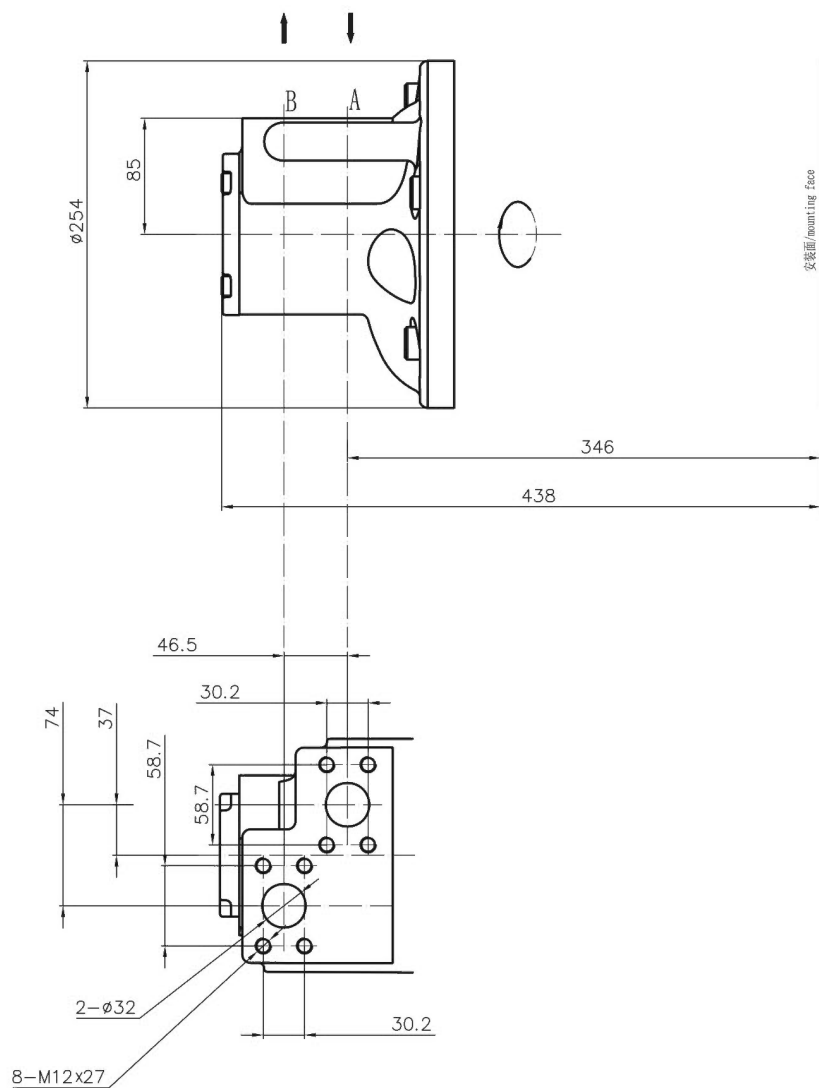

© 2000 Blackwell Science Ltd *Journal of Internal Medicine* 247: 101–107



H-HMC270系列/H-HMC270 Series

技术参数 / Technical Specification

名义排量 Nominal Displacement 编码标识 Ordering Code 3 4	ml/r	4600	4100	3600	3300	3000	2600	2300	1900	1600	1400	970	680	500	340	170
排量 Displacement	ml/r	4597	4086	3632	3291	2951	2610	2270	1930	1646	1362	965	681	500	340	170/0
单位扭矩 Unit Torque	N.m/MPa	657	585	514	460	419	356	310	259	210	168	108	73	47	24	0
最高转速 Max. Speed	r/min	108	120	135	145	165	180	215	240	290	315	315	315	315	315	900
额定功率 Rated Power	KW	123	115	104	97	90	83	76	68	59	48	37	25	18	8	0
最大功率 Max. Power	KW	153	149	142	136	129	122	112	102	91	81	68	47	32	12	0
额定压力 Rated Pressure	MPa	23	23	23	23	23	23	23	23	23	23	23	23	23	23	1.5
最高压力 Max. Pressure	MPa	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	1.5


* H-HMC270排量的选择范围/ H-HMC270 displacement options

大排量为 / Large Displacement: 4600, 4100, 3600, 3300


小排量为 / Small Displacement: 3300, 3000, 2600, 2300, 1900, 1600, 1400, 970, 680, 500, 340, 170, 0

控制原理图 / Control Schematic(编码标识/Ordering Code 8):


-A- 外控型
Control by external

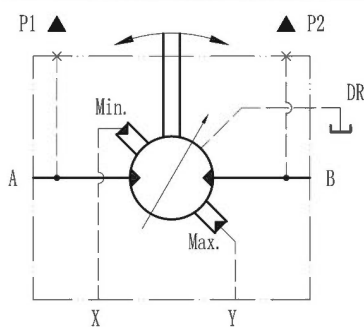


-B- PC外控型
Control by port pc

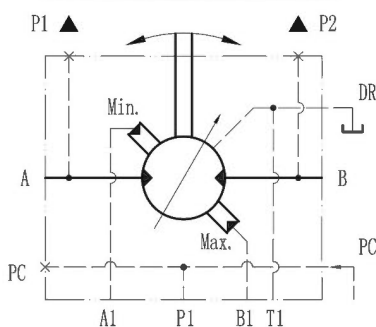


-C- 双向内控型
Control by A or B

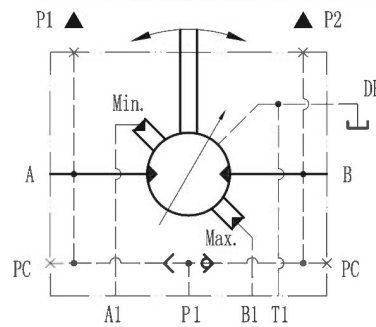

-D- A口内控型
Control by port A

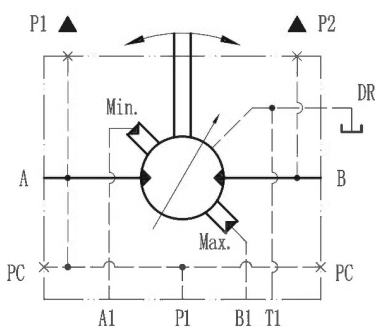

-E- B口内控型
Control by port B

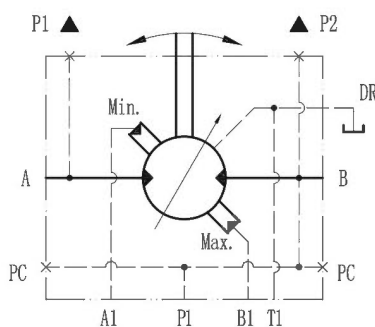

H-HMC325系列/H-HMC325 Series

技术参数 / Technical Specification


名义排量 Nominal Displacement 编码标识 Ordering Code 3 4	ml/r	5300	5100	4900	4600	4100	3600	3300	3000	2600	2300	1900	1600	1500	1400	970	680	500	340	170
排量 Displacement	ml/r	5335	5108	4937	4597	4086	3632	3291	2951	2610	2270	1930	1646	1532	1362	965	681	500	340	170/0
单位扭矩 Unit Torque	N.m/Mpa	763	731	706	706	657	514	460	419	356	310	259	210	196	168	108	73	47	24	0
最高转速 Max. Speed	r/min	90	105	110	110	108	135	145	165	180	215	240	290	315	315	315	315	315	315	900
额定功率 Rated Power	KW	123	123	123	123	123	104	97	90	83	76	68	59	54	48	37	25	18	8	0
最大功率 Max. Power	KW	153	153	153	153	153	142	136	129	122	112	102	91	87	81	68	47	32	12	0
额定压力 Rated Pressure	MPa	23	23	23	23	23	23	23	23	23	23	23	23	23	1.5	23	23	23	23	1.5
最高压力 Max. Pressure	MPa	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	1.5

* H-HMC325排量的选择范围/ H-HMC325 displacement options


大排量为 / Large Displacement: 5300, 5100, 4900, 4600, 4100;

小排量为 / Small Displacement: 3600, 3300, 3000, 2600, 2300, 1900, 1600, 1500, 1400, 970, 680, 500, 340, 170, 0

控制原理图 / Control Schematic(编码标识/Ordering Code 8):


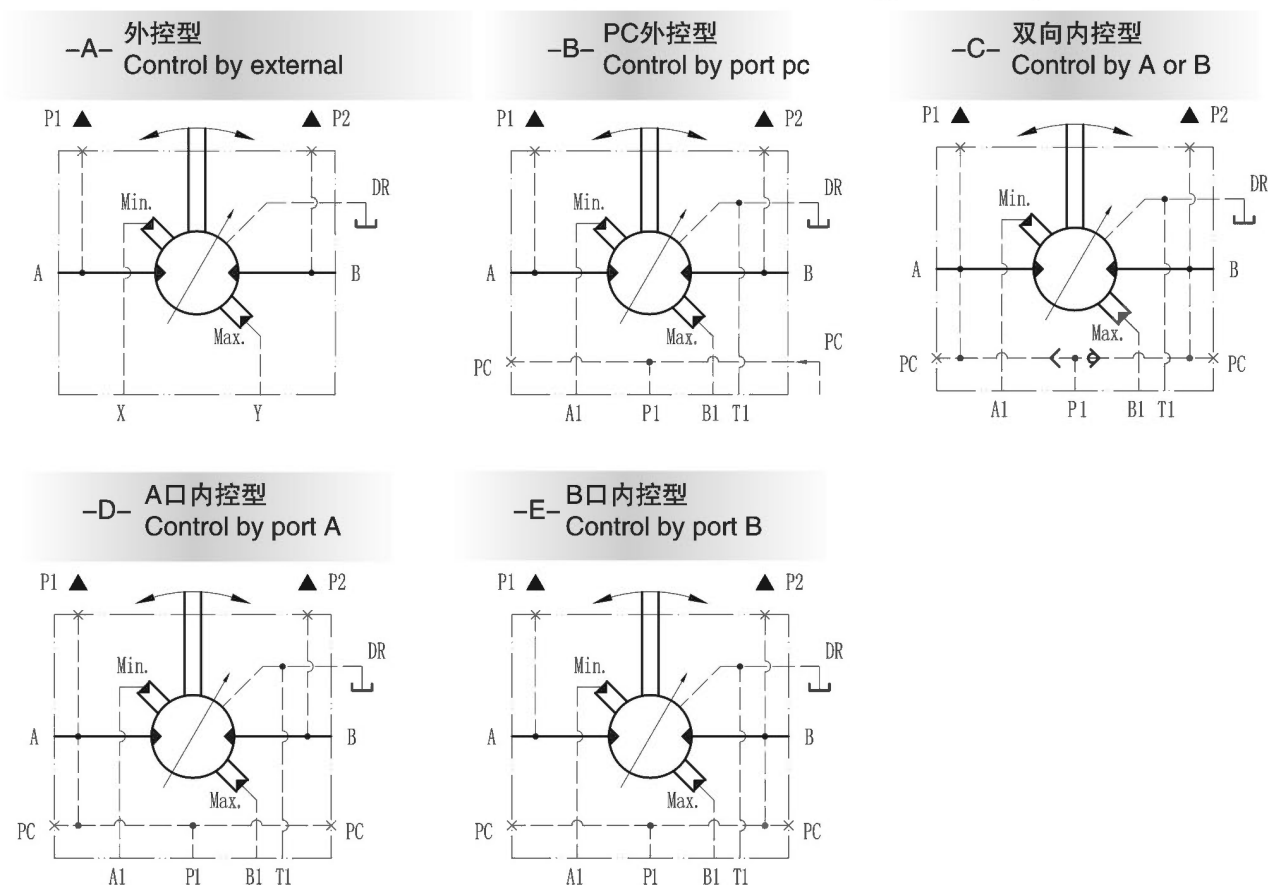


H-HMC270 外形及安装尺寸/ H-HMC270 Installation Dimensions

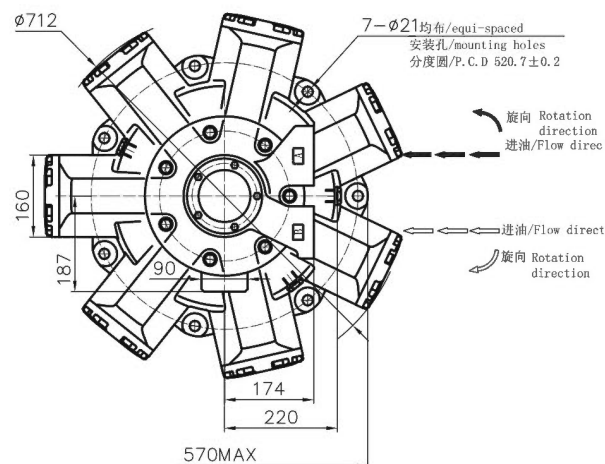[illegible]

*①可选配UNF3/4"-16接头/Option: UNF3/4"-16

进出油口为F03的安装尺寸/With F03 Distributor

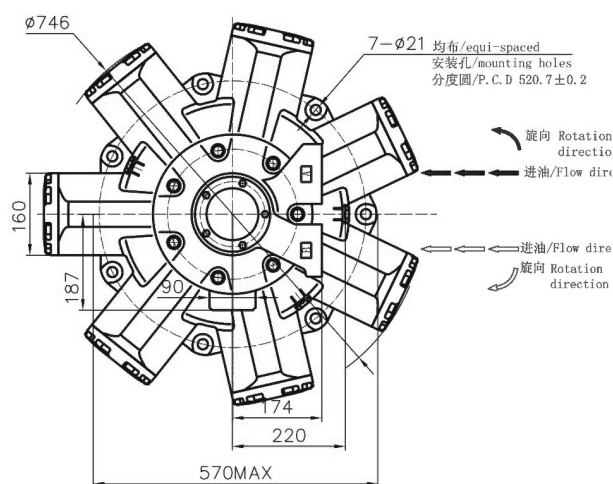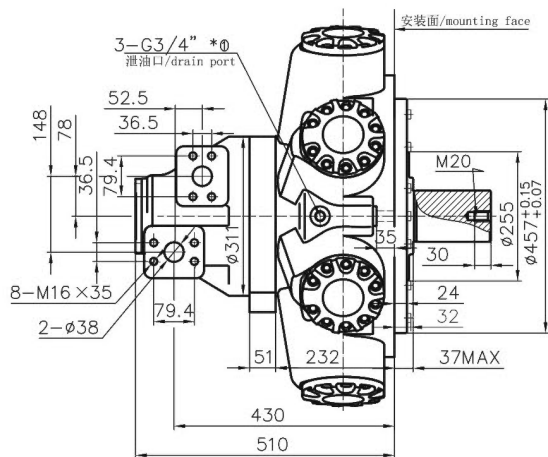


*①可选配UNF3/4"-16接头/Option: UNF3/4"-16


H-HMC270/325系列/H-HMC270/325 Series

变量控制方式的安装尺寸/ Variable Control Dimensions (编码标识/Ordering code 8)

A的安装尺寸/Dimensions




B&C&D的安装尺寸/Dimensions




H-HMC270&H-HMC325 输出轴的安装尺寸/ Shaft Options(编码标识/Ordering code 5)


H-HMC270/H-HMC325-P71

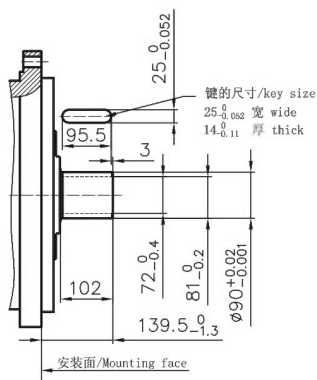


H-HMC270/H-HMC325-P73

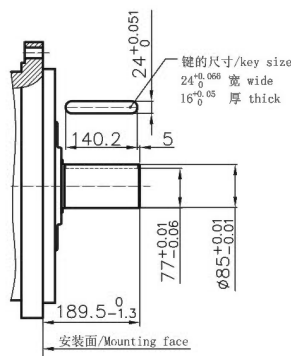


H-HMC270/H-HMC325-S71*&S72*

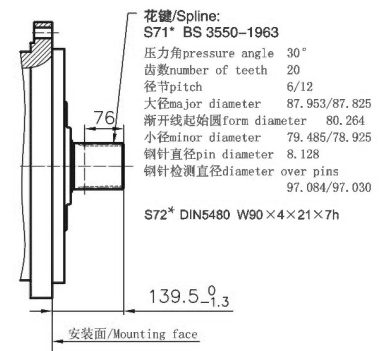


H-HMC270/H-HMC325-Q71

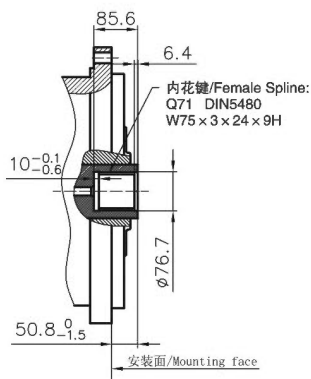

H-HMC270/H-HMC325-T71

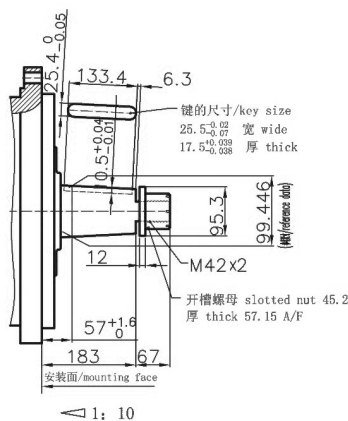

H-HMC270/H-HMC325-T72

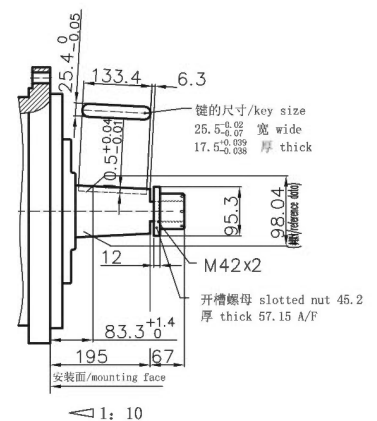

注释: S71*/S72* 为标准花键轴
Notes: S71*/ S72*=Standard Spline Shaft

H-HMC270/325系列/H-HMC270/325 Series

H-HMC270/325 外形及安装尺寸/ H-HMC270/325 Installation Dimensions

进出油口为F03B的安装尺寸/ F03B Distributor

