



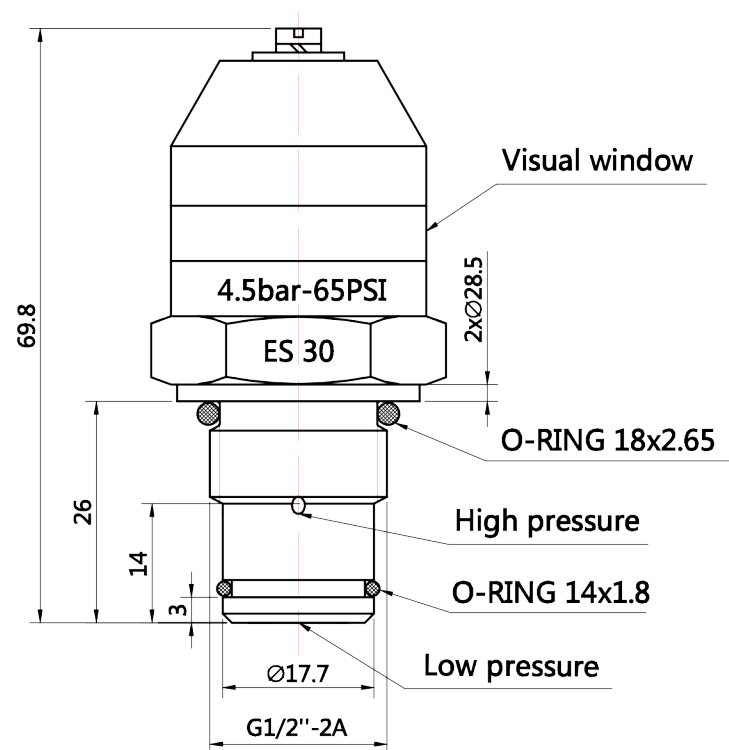

Note (技术参数) :



1. Opening Pressure (发讯值) : 1~8bar±10%bar 可选
2. Working Pressure (耐压值) : 420bar
3. Seal (密封件材质) : NBR 70SH
4. Body (材质) : 304
5. Connection (螺纹接口) : G1/2"-2A

**CM-I-G1/2-4.5bar -
Визуальный индикатор**

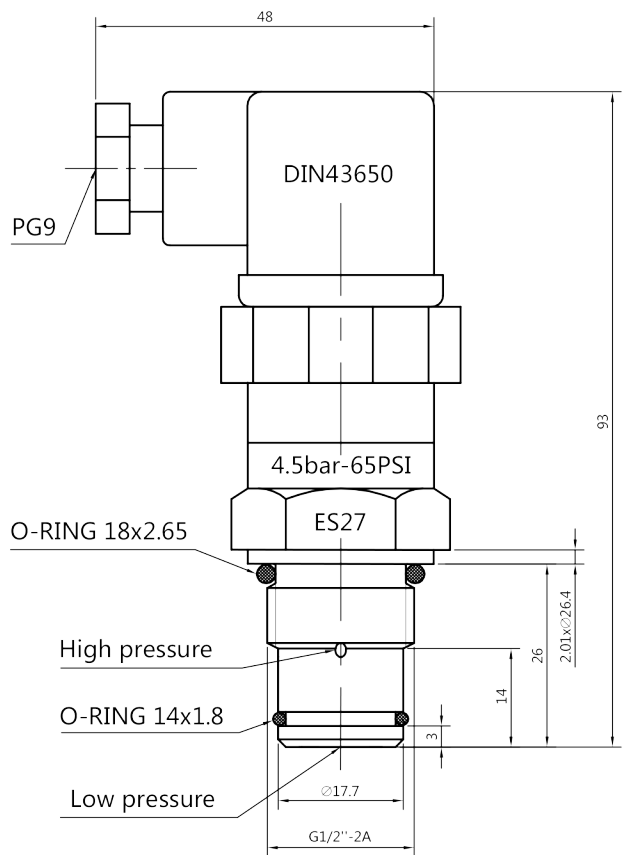


Electrical wiring diagram
电气接线图


- Note (技术参数) :
- 1. Opening Pressure (发讯值) : 1~8bar±10%bar
 - 2. Working Pressure (耐压值) : 420bar
 - 3. Seal (密封件材质) : NBR 70
 - 4. Body (材质) : 304
 - 5. Connection (螺纹接口) : G1/2''-2A
 - 6. Ingress Protection (防护等级) : IP65
 - 7. Working temperature (工作温度) : -20℃~100℃
 - 8. Electrical characteristics (电气特性) : 250VAC 3A

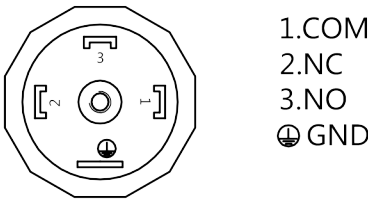

CS-III-G1/2-4,5 bar - Электрический индикатор

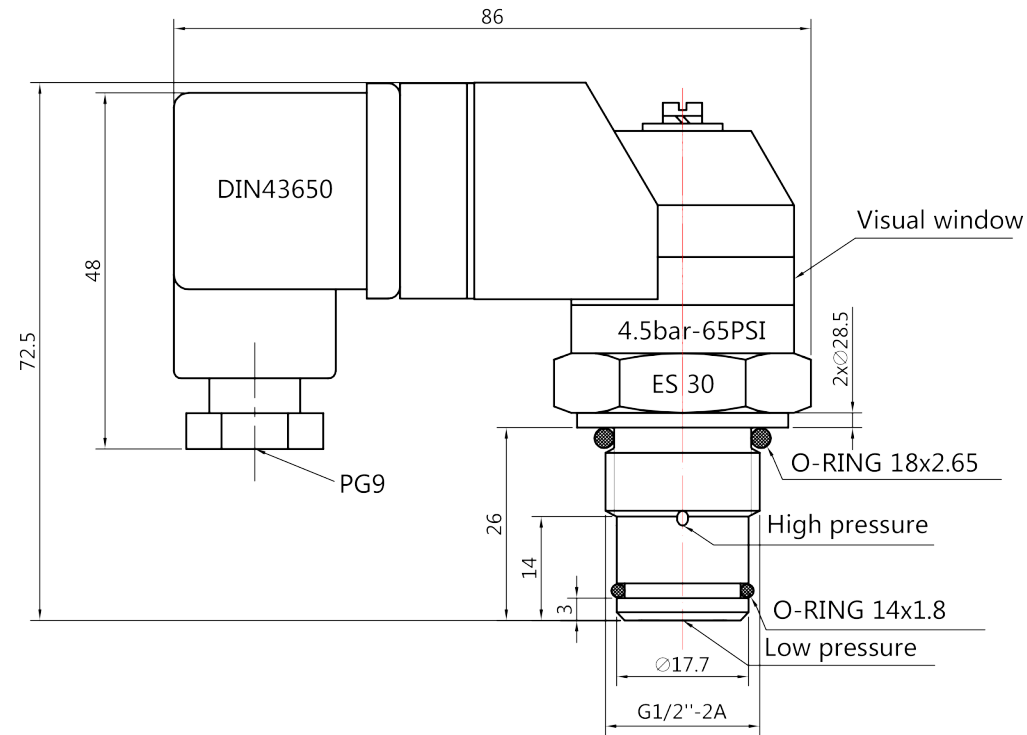

Electrical wiring diagram
电气接线图



- 1.COM
- 2.NO
- 3.NC
- ⊕ GND

Note (技术参数) :

1. Opening Pressure (发讯值) : $4.5 \pm 10\%$ bar
2. Working Pressure (耐压值) : 315 bar
3. Seal (密封件材质) : 12.42x1.78 NBR 70. 22x2 NBR 90
4. Body (材质) : 304
5. Connection (螺纹接口) : G1/2"
6. Ingress Protection (防护等级) : IP65
7. Working temperature (工作温度) : $-20^{\circ}\text{C} \sim 100^{\circ}\text{C}$
8. Electrical characteristics (电气特性) : 250VAC 3A

D2-G1/2-4.5BAR -
Электровизуальный индикатор