

KHP (PKH) 系列板式球阀
KHP(PKH) 2-way Ball Valve For Sub-plate Mounting

型号说明 Model Code

KHP(PKH)-10 - 1 1 1 2 - 01 - 1
1 2 3 4 5 6 7 8


- 1、系列代号：KHP (PKH) 系列板式球阀
 - 2、公称通径：06、10、16、20、25、32、40、50
 - 3、阀体、堵塞材料：1-45#、3-不锈钢316
 - 4、阀锁、阀芯材料：1-45#、3-不锈钢316
 - 5、球封材料：1-POM (聚甲醛)、2-PTFE(聚四氟乙烯)
 - 6、其他密封件材料: 1-NBR (丁晴橡胶)、2-FPM/FKM(氟橡胶)
 - 7、手柄形式: 01-C型锌合金曲手柄、02-B型锌合金曲手柄、03-B型铸钢曲手柄、09-不带手柄；
 - 8、表面处理: 1-蓝白三价铬; 2-锌镍合金
- 备注：材料1111为常规组合，PTFE材料使用时最高工作压力不超过100bar (其它特殊组合型式请咨询)

- 1.Series Code:KHP(PKH)Series Ball Valve For Sub-plate Mounting
 - 2.Nominal Diameter:06、10、16、20、25、32、40、50
 - 3.Valve body material:1-carbon steel 、3-316 stainless steel
 - 4.Ball body/ Valve stem material:1-carbon steel、3-316 stainless steel
 - 5.Ball sealing material:1-POM 2-PTFE
 - 6.Sealing material(Sealing material of joint/valve stem):1-NBR 2-FPM/FKM
 - 7.Handle Type:01-C type zinc alloy crooked handle 02-B type zinc alloy crooked handle 03-B type casting steel crooked handle 09-without handle
 - 8.Surface Treatment: 1-SILVER ZINC PLATED
- PS:1111 is the normal mix ,the PN no more than 100bar when using PTFE.(more specifications please call us)

图形符号 Hydraulic Schematic



外形尺寸 Overall Dimension

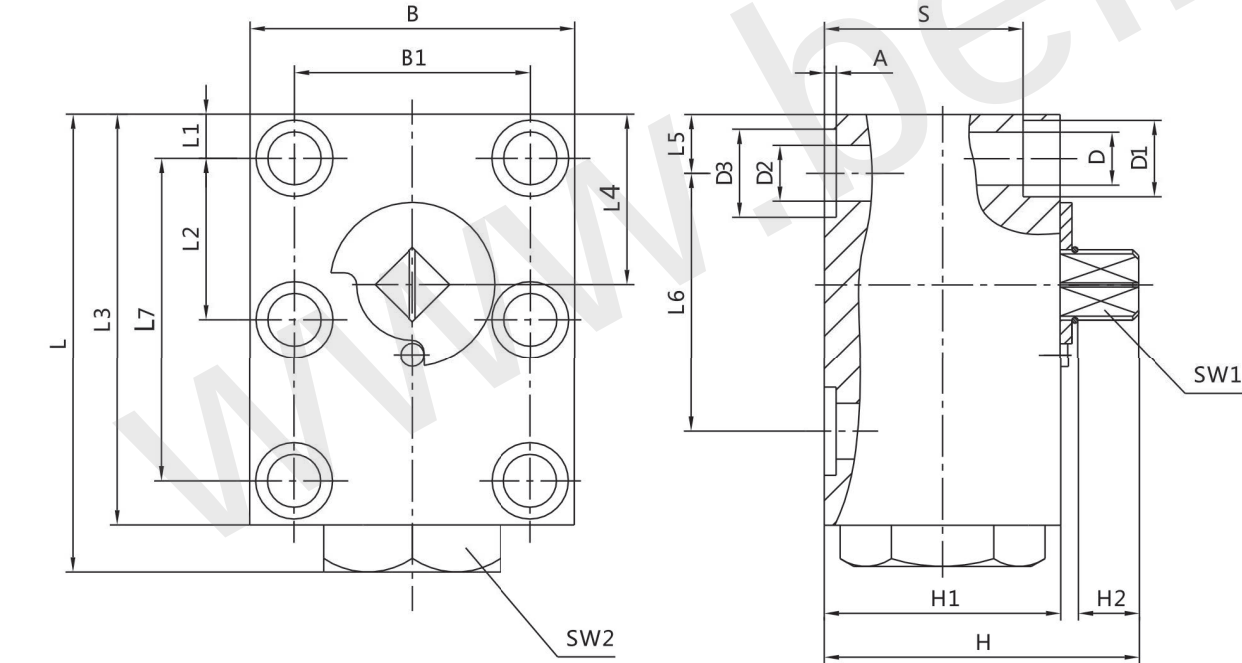

简略型号 Brief Model	PN (bar)	DN	LW	L	L1	L2	L3	L4	L5	L6	L7	B	B1
KHP-06	500	06	06	64	8.5	17.5	59	25	8.5	35	35	40	27
KHP-10	500	10	9.5	77	7.5	27.5	70	29	10	44	55	55	40
KHP-16	400	16	16	110	8.5	41.5	100	43	17	58	83	60	45
KHP-20	400	20	20	126	10	48.5	117	51	20	69	97	70	51
KHP-25	350	25	23.5	145	10	57.5	135	64.5	24	81	115	80	60
KHP-32	350	32	30	178	12	68	165	75.5	29	96	136	100	78
KHP-40	350	40	38	200	30	56	185	80	30	112	112	130	95
KHP-50	350	50	48	245	38	68	220	106	38	136	136	149	112

简略型号 Brief Model	SW1	SW2	H	H1	H2	D	D1	D2	D3	A	S	o形圈 O-ring
KHP-06	07	22	40	30	7	6.6	10.5	6	11.7	1.6	23.5	8×2
KHP-10	09	30	54.3	40	10.5	9	13	9.5	15	2	31	15×2.4
KHP-16	09	41	66.3	52	10.5	9	13	16	25	2	43	25×2.4
KHP-20	12	41	76.3	60	10.3	10.5	16.5	20	30	2.5	50	30×3.1
KHP-25	12	46	81	65	10.8	10.5	17	23.5	35	2.5	55	35×3.1
KHP-32	12	55	96.5	80	10.8	13	19	30	40	2.5	67	40×3.5
KHP-40	14	65	117.5	93	12.8	17	25	38	48	3	77	48×3.6
KHP-50	14		129	110	12	22	33	48	55.4	2.9	88.5	49×3.5

简略型号 Brief Model	内六角螺栓DIN912 Inner Hexagon Screw Thread	扭矩 Nm (摩擦系数μ=0.14时) Torque Nm(Rub Coefficient μ=0.14Time)
KHP-06	M6-10.9	13
KHP-10	M8-10.9	30
KHP-16	M8-12.9	35
KHP-20	M10-12.9	60
KHP-25	M10-12.9	60
KHP-32	M12-12.9	110
KHP-40	M16-12.9	300
KHP-50	M20-12.9	600