

型号说明/Model Code

HGVRDE - **G1/2** - **15LR** - ******

①

②

③

④

① 系列代号

HGVRDE-双向液压锁

② V1、V2螺纹规格

G1/4 G3/8 G1/2 G3/4



③ C1、C2螺纹规格

G1/4、G3/8、G1/2、G3/4、10L、12、15L、18L等，当V1、V2、C1、C2螺纹规格一样时，其中一个省略，例：HGVRDE-G1/4代表V1、V2、C1、C2口螺纹规格均为G1/4


④ 区别代号，没有可省略





外形尺寸/Dimensions

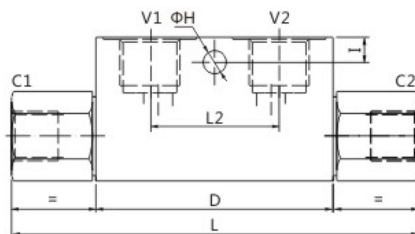

图形符号/Symbol



型号 Model	V1 V2 C1 C2	L	D	B	C	E	ΦH	L2	I	先导比	最大流量 L/min	最高压力 bar	开启压力 bar
HGVRDE-G1/4	G1/4	113	66	30	40	12.5	6.5	36	7	1:5.5	20	350	3
HGVRDE-G3/8	G3/8	113	66	30	40	12.5	6.5	36	7	1:5.5	35	350	3
HGVRDE-G1/2	G1/2	139	80	40	50	16	8.5	40	15	1:4	60	350	3
HGVRDE-G3/4	G3/4	190	100	40	60	20	8.5	40	15	1:4	100	300	3

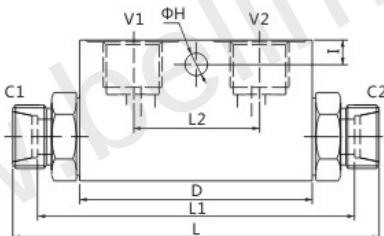

型号 Model	V1、V2	C1、C2	L	L1	D	B	C	E	ΦH	L2	I	先导比	最大流量L/min	最高压力bar	开启压力bar
HGVRDE-G1/4-10L	G1/4	10L	113	99	66	30	40	12.5	6.5	36	7	1:5.5	20	350	3
HGVRDE-G1/4-12L	G1/4	12L	113	99	66	30	40	12.5	6.5	36	7	1:5.5	20	350	3
HGVRDE-G3/8-12L	G3/8	12L	113	99	66	30	40	12.5	6.5	36	7	1:5.5	35	350	3
HGVRDE-G3/8-15L	G3/8	15L	139	115	80	40	50	16	8.5	40	15	1:4	50	350	3
HGVRDE-G1/2-15L	G1/2	15L	139	115	80	40	50	16	8.5	40	15	1:4	60	350	3
HGVRDE-G1/2-18L	G1/2	18L	139	114	80	40	50	16	8.5	40	15	1:4	70	350	3

以上型号产品均不带卡套接头，如需带卡套型号后面加“-KT”，例如：HGVRDE-G1/4-12LR-KT。

流量曲线图/Flow Diagram

